



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification: <b>F02B 63/02, F01M 11/06</b>	<b>A1</b>	(11) International Publication Number: <b>WO 00/43655</b> (43) International Publication Date: 27 July 2000 (27.07.2000)
(21) International Application Number: <b>PCT/US00/00841</b> (22) International Filing Date: <b>13 January 2000 (13.01.2000)</b> (30) Priority Data: <b>60/117,215      25 January 1999 (25.01.1999) US</b> (60) Parent Application or Grant <b>BRIGGS &amp; STRATTON CORPORATION [/]; O. HIRSCH, Nicholas, Robert [/]; O. SCHAEFER, Mark, Donald [/]; O. BRAUN, Michael, Paul [/]; O. HOTZ, Peter [/]; O. WIATROWSKI, Darrell, Albert [/]; O. BARTELT, Ronald, Lee [/]; O. HUBBARD, Brian [/]; O. HIRSCH, Nicholas, Robert [/]; O. SCHAEFER, Mark, Donald [/]; O. BRAUN, Michael, Paul [/]; O. HOTZ, Peter [/]; O. WIATROWSKI, Darrell, Albert [/]; O. BARTELT, Ronald, Lee [/]; O. HUBBARD, Brian [/]; O. LASKA, Casimir, F. ; O.</b>		<b>Published</b>
(54) Title: <b>FOUR-STROKE INTERNAL COMBUSTION ENGINE</b> (54) Titre: <b>MOTEUR A COMBUSTION INTERNE A QUATRE TEMPS</b>		
(57) Abstract <p>A four-stroke internal combustion engine (20) is provided. There is provided within an engine housing (28) an oil reservoir (126) and a valve chamber (156) which independently communicate with a crank chamber (124). A strategically placed divider (116) and passageway, located within the engine housing (28), appropriately direct lubricant within the engine housing (28) so that the internal cavity of the engine is lubricated during use in various operating attitudes, and so that the fluid flows to and is held in the proper chambers of the engine housing during storage. There is also provided a breather arrangement for an internal combustion engine (20) which includes a cam shaft (98) having a hollow passageway in communication with the crank chamber (124) and the air intake system of the engine. There is also provided an engine housing which can be utilized for engines having different horse power ratings. There is also provided a crankshaft bearing assembly (68, 70) which prevents damage to the bearing upon insertion of the crankshaft (80) into the crank chamber (124).</p> <p>(57) Abrégé</p> <p>L'invention concerne un moteur (20) à combustion interne à quatre temps. Ce moteur comprend un bloc moteur (28) un carter d'huile (126) et un logement de soupapes (156) qui communique de façon indépendante avec un carter du moteur (124). Une chicane (116) stratégiquement placée et un passage, situés dans le corps de moteur (28), canalisent de façon appropriée l'huile de graissage dans le corps de moteur (28) de sorte que la cavité intérieure du moteur est lubrifiée dans diverses positions, et de sorte qu'elle s'écoule et soit retenue dans les chambres du corps du moteur appropriées pendant l'arrêt. L'invention concerne aussi un reniflard pour moteur (20) à combustion interne qui comprend un arbre à cames (98) possédant un passage creux en liaison avec le carter du moteur (124) et avec le système d'admission du moteur. L'invention concerne encore un bloc moteur qui peut être utilisé pour des moteurs de puissances différentes. Enfin, l'invention concerne un ensemble palier de vilebrequin (68, 70) qui ne risque pas d'être endommagé lors de l'insertion du vilebrequin (80) dans le carter du moteur.</p>		

PCT


WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>7</sup> : F02B 63/02, F01M 11/06		A1	(11) International Publication Number: WO 00/43655
			(43) International Publication Date: 27 July 2000 (27.07.00)
(21) International Application Number: PCT/US00/00841		(74) Agent: LASKA, Casimir, F.; Michael Best & Friedrich LLP, 100 East Wisconsin Avenue, Milwaukee, WI 53202 (US).	
(22) International Filing Date: 13 January 2000 (13.01.00)			
(30) Priority Data: 60/117,215 25 January 1999 (25.01.99) US		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).	
(71) Applicant (for all designated States except US): BRIGGS & STRATTON CORPORATION [US/US]; 12301 West Wirth Street, Wauwatosa, WI 53222 (US).			
(72) Inventors; and			
(75) Inventors/Applicants (for US only): HIRSCH, Nicholas, Robert [US/US]; N. 39 W. 27369 Glacier Road, Pewaukee, WI 53072 (US). SCHAEFER, Mark, Donald [US/US]; S. 38 W. 32010 Highway Drive, Waukesha, WI 53189 (US). BRAUN, Michael, Paul [US/US]; 1924 Ludington Avenue, Wauwatosa, WI 53226 (US). HOTZ, Peter [US/US]; 6128 N. Berkeley Boulevard, Whitefish Bay, WI 53217 (US). WIATROWSKI, Darrell, Albert [US/US]; 12188 W. Eastwood Road, Beach Park, IL 60087 (US). BARTELT, Ronald, Lee [US/US]; S. 68 W. 17074 Martin Drive, Muskego, WI 53150 (US). HUBBARD, Brian [US/US]; Unit C, 2010 Division Street, East Troy, WI 53120 (US).		Published With international search report.	

(54) Title: FOUR-STROKE INTERNAL COMBUSTION ENGINE

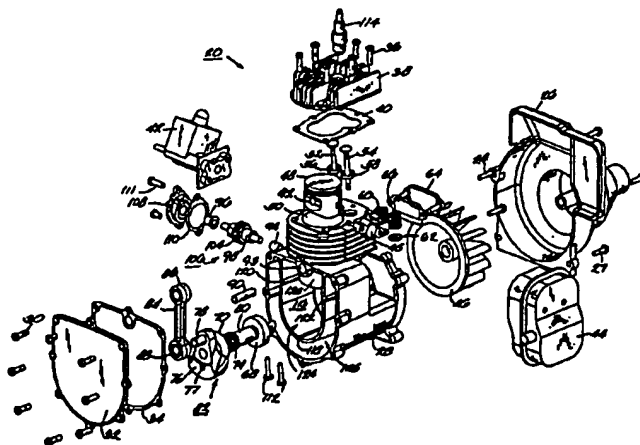

(57) Abstract

A four-stroke internal combustion engine (20) is provided. There is provided within an engine housing (28) an oil reservoir (126) and a valve chamber (156) which independently communicate with a crank chamber (124). A strategically placed divider (116) and passageway, located within the engine housing (28), appropriately direct lubricant within the engine housing (28) so that the internal cavity of the engine is lubricated during use in various operating attitudes, and so that the fluid flows to and is held in the proper chambers of the engine housing during storage. There is also provided a breather arrangement for an internal combustion engine (20) which includes a cam shaft (98) having a hollow passageway in communication with the crank chamber (124) and the air intake system of the engine. There is also provided an engine housing which can be utilized for engines having different horse power ratings. There is also provided a crankshaft bearing assembly (68, 70) which prevents damage to the bearing upon insertion of the crankshaft (80) into the crank chamber (124).

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

)

**Description**

5

10

15

20

25

30

35

40

45

50

55

**FOUR-STROKE INTERNAL COMBUSTION ENGINE****CROSS-REFERENCE TO RELATED APPLICATION**

This application claims the benefit of U.S. Provisional Application No. 60/117,215, filed January 25, 1999.

**FIELD OF THE INVENTION**

The present invention relates, generally, to four-stroke internal combustion engines and, more particularly, to four-stroke internal combustion engines used in trimmers, blowers, vacuums, chain saws, other hand-held power tools, snowblowers, generators, vegetation cutting devices such as lawn mowers, or other outdoor power equipment.

**BACKGROUND OF THE INVENTION**

Many hand-held power tools or other outdoor power equipment are powered by electric motors or two-stroke internal combustion engines. Electric motors are limited to certain applications due to the available power for products utilizing a cord, and battery longevity for cordless products. Conventional two-stroke engines include a lubricating means in which the lubricant is mixed with fuel which allows the engines to operate in any given position such as upright, inclined, sideways or upside down. For example, when using a chain saw, the chain saw is typically capable of use in either an upright, sideways or upside down condition. Over the past few years, there has been a requirement by various governing bodies to reduce the emissions associated with all small gas engines, particularly, conventional two-stroke engines. Thus, because four-stroke engines do not require the mixing of lubricant and fuel, it is desirable to use four-stroke engines in place of conventional two-stroke engines, since four-stroke engines normally release fewer undesirable emissions as compared to the amount of undesirable emissions released by conventional two-stroke engines.

5                   However, previously, it was widely viewed that four-stroke internal combustion  
engines could only be used for limited applications, such as lawn mowers, snowblowers,  
generators, or other portable products having wheels. It was thought that these prior four-  
10                   stroke engines were too heavy and cumbersome to be used in operator-carried power tools.  
5                   Moreover, since it is generally necessary to store oil separate from the gas so that the oil  
can be used for lubrication, traditional low-cost four-stroke engines were not designed to  
operate in any position other than a substantially upright position because if the engine  
15                   was significantly tipped or tilted, the lubricant would foul the engine. Only very recently  
has it been contemplated that a four-stroke engine may be used in a hand-held power tool  
10                   or in other applications where the engine may operate in a tipped or tilted condition.

### 20                   SUMMARY OF THE INVENTION

                  Accordingly, there is a need for a four-stroke internal combustion engine that is  
25                   15                   capable of use in various power tools, and yet is also capable of having low emissions and  
being sufficiently light to be carried by an operator when desired. What is also needed is a  
four-stroke internal combustion engine that is capable of operating in many different  
30                   attitudes of the engine. What is also needed is a four-stroke engine that eliminates the  
need for an elaborate lubrication system. What is needed is a four-stroke internal  
20                   combustion engine which accomplishes these features and other features and which is also  
economical to manufacture.

                  In one embodiment of the present invention, there is provided a four-stroke internal  
35                   combustion engine, preferably a side valve or "L" head engine, having an engine housing  
which includes a crankcase and a cylinder. A cylinder head which at least partially defines  
25                   a combustion chamber is positioned adjacent to the cylinder. An intake valve and an  
40                   exhaust valve are disposed within the engine housing. A crank chamber and an oil  
reservoir are disposed within the crankcase in such a way that the oil reservoir is in fluid  
flow communication with the crank chamber. A strategically placed agitator, located at  
45                   least partially within the crank chamber, moves lubricant within the engine housing during  
30                   operation of the engine to lubricate the necessary components of the engine.

                  A divider is disposed within the crankcase to at least partially divide the crank  
chamber and the oil reservoir. The divider assists in directing the lubricant during  
50                   operation and storage of the engine in order to prevent a substantial amount of lubricant

5 from undesirably migrating into the combustion chamber when the engine is operated or  
stored in an upright or tilted position. In one aspect of the present invention, the divider  
defines a path which extends about the divider. The path allows lubricant in the oil  
10 reservoir to flow around a substantial portion of the divider to further enhance the  
5 lubricating and storage features of the engine according to the principles of the present  
invention.

15 The engine is constructed of light weight material and appropriately sized so that  
the engine is sufficiently light enough to be usable in hand-held power tools. Thus, the  
four-stroke internal combustion engine according to the present invention may be utilized  
10 in those applications which are traditionally limited to the use of two-stroke internal  
combustion engines.

20 In one aspect of the present invention, the divider includes at least one opening  
such that the crank chamber and the oil reservoir are in fluid flow communication through  
the opening. The opening helps ensure that the crank chamber is substantially  
25 continuously lubricated during operation of the engine, even if the engine is operated  
under a tilted condition. The opening in the divider is positioned such that at least some of  
the lubricant found in the crank chamber after operation of the engine may flow back into  
the oil reservoir even if the engine is stored in a tilted state. Preferably, the divider  
30 includes a plurality of openings.

20 In another aspect of the present invention, the engine housing further includes a  
cylinder side wall which at least partially extends into the crank chamber to define a  
lubricant receiving space between the divider and the cylinder side wall. Preferably, the  
35 cylinder side wall at least partially defines a piston bore. During operation, as the agitator  
mixes and slings lubricant around the inside cavity of the engine as a result of the rotating  
25 action of the agitator, the lubricant is more likely to be slung into the open area between  
the divider and the cylinder side wall rather than into the piston bore. Moreover, during  
storage, the open area or lubricant receiving space provides additional space for the  
40 lubricant to be held if the engine is stored in a sideways or upside down position to also  
prevent a substantial amount of the lubricant from flowing into the piston bore. As  
45 previously noted, migration of the lubricant into the combustion chamber leads to an  
unwanted condition. A function of the lubricant receiving space is to inhibit lubricant  
30 from reaching the piston bore, thereby preventing a substantial amount of lubricant from  
reaching the combustion chamber.

5 In another aspect of the present invention, the engine housing further includes a  
valve chamber. The intake valve and exhaust valve are disposed within the valve chamber  
and the valve chamber is in fluid flow communication with the crank chamber. The  
10 operation of the agitator, the pressure pulses created within the engine during operation of  
the engine, the communication of the oil reservoir with the crank chamber, and the  
5 communication of the crank chamber with the valve chamber together allow the working  
components found within the valve chamber to be lubricated, even if the engine is  
15 operated in a tilted manner. Preferably, the valve chamber is also in fluid flow  
communication with the cylinder side wall to further enhance the lubrication of the  
20 working components located within the valve chamber. The strategic positioning of the  
fluid flow openings into the valve chamber will prevent the valve chamber from receiving  
too large of a quantity of lubricant when the engine is being operated or being stored.

In another embodiment of the present invention, the engine includes a cantilevered  
crankshaft which has opposite ends and which is substantially located within the crank  
25 chamber. The agitator includes a counterweight which is interconnected to the  
cantilevered end of the crankshaft. The counterweight is adapted to reduce windage  
resistance on the crankshaft and to sling lubricant about the crank chamber as the  
30 crankshaft rotates during operation of the engine. Further, the counterweight throws the  
lubricant away from the main bearings of the crankshaft, thereby substantially preventing  
20 the main bearings from being flooded by the lubricant during operation of the engine. The  
divider may be provided with a scraper which is used to limit the amount of lubricant  
35 which comes into contact with the agitator or the counterweight. The scraper preferably at  
least partially extends into the crank chamber, so that as the agitator rotates past the  
scraper during operation of the engine, the scraper meters the amount of lubricant which  
25 comes into contact with the agitator.

40 In another aspect of the present invention, a cam shaft disposed substantially  
normal to the crankshaft is rotatably driven by the crankshaft. The substantially normal  
arrangement of the cam shaft and crankshaft enables the engine to be longer in a direction  
45 parallel to a power take off, as compared to a conventional engine in which the cam shaft  
is parallel with the crankshaft. Such an engine is desirable in certain hand-held power tool  
30 applications, such as power trimmers, in order to provide an overall better balance of the  
power tool for the convenience of the user. The substantially normal arrangement of the  
50 shafts also allows for an intake port and an exhaust port disposed in the cylinder to be



5 significantly spaced apart. Segregating the ports will reduce heat migration from the exhaust port to the intake port which could result in hot restart (e.g., vapor lock) problems.

10 Preferably, the intake and exhaust ports are elliptical in shape. The elliptical configuration of the ports enables the overall profile or height of the engine housing to be reduced, thereby reducing the amount of material needed for the overall engine housing. This helps reduce the overall weight of the engine housing. The port walls are provided with sufficient surface area and strength to support the portion of the engine housing and cylinder head disposed above the ports. The substantially normal relationship between the crankshaft and the cam shaft also allows the valves to be disposed substantially normal to the crankshaft. A first valve tappet associated with the intake valve and a second valve tappet associated with the exhaust valve operatively engage the cam shaft to provide for the proper operation of the valves with respect to a four-stroke internal combustion engine. Such a compact arrangement further limits the overall weight of the engine.

15 In another embodiment of the present invention, a breather arrangement for the four-stroke internal combustion engine is provided. The cam shaft is provided with an axial passageway and several radial apertures. The radial apertures communicate with the crank chamber and the passageway. A breather tube communicates with the passageway and an air intake system of the engine. A check-valve is positioned between the end of the cam shaft and the air intake system to maintain the negative pressure created within the engine. Blow-by gas inside the engine is admitted into the radial aperture of the cam shaft and is sent through the axial passageway of the cam shaft and into the breather tube, so that the blow-by gas is recirculated within the engine. The pressure pulses created within the engine cause the blow-by gas to enter the cam shaft and be recirculated as described. However, the centrifugal action of the cam shaft counters the action created by the pressure pulses, thereby substantially preventing the heavier lubricant, as compared to the blow-by gas, from entering the radial apertures in the cam shaft. As a result, the lubricant will substantially remain within the cavity of the engine and will not travel through the breather tube to the air intake system of the engine.

25 In another aspect of the present invention, the engine housing is designed to cooperate with a piston found within the piston bore such that a connecting rod can be conveniently attached to the piston and the crankshaft. The crankcase and the piston each include an access hole. A connecting rod is operatively attached to the crankshaft and the piston in the following manner. The access hole in the crankcase and the access hole or

5 aperture in the piston are aligned during installation of a wrist pin. The wrist pin is  
inserted into the piston aperture and through an end of the connecting rod to connect the  
connecting rod to the piston. A star washer is used to hold the wrist pin in place after  
10 installation.

5 The compact size of the engine according to the present invention and the  
cantilevered crankshaft make it difficult to assemble the internal components of the  
engine, such as the piston-connecting rod-crankshaft assembly. The cooperation of the  
15 access holes in the crankcase and the piston allow for easy assembly of the piston-  
connecting rod-crankshaft assembly. Preferably, it is desirable to use the same engine  
10 housing casting for engines having different horsepower ratings, simply by changing the  
connecting rod and thus, the length of the piston throw. To facilitate assembly and to  
20 permit the same engine housing casting to be used for different sized engines, an elliptical,  
or the like, wrist pin boss is formed in the crankcase of the engine housing. The wrist pin  
boss can be machined at its upper end to provide an access hole in the crankcase for a first  
25 horsepower rating or piston throw, and the wrist pin boss can be machined at its lower end  
to provide an access hole in the crankcase for a second horsepower rating or piston throw.  
After the wrist pin boss is properly machined, the wrist pin—which connects the piston to  
30 the connecting rod—is inserted through the crankcase aperture and into the piston aperture  
as previously explained. In this way, the same engine housing casting can be used for  
20 different sized engines.

In another aspect of the present invention, the crank chamber includes at least two  
35 bearing pockets. One of the pockets has a larger diameter than the other. Both of the  
bearing pockets are disposed on the same side of the internal cylinder side wall. The  
cantilevered crankshaft is supported by two main bearings located in the respective  
25 bearing pockets. The bearing pocket nearest the cantilevered (input) end of the crankshaft  
40 is the larger diameter bearing pocket so that the bearing pockets can be machined in the  
crank chamber from the same side with a single tool thereby eliminating unnecessary  
tooling requirements. This provides a significant savings in capital costs and  
45 manufacturing expenses. Preferably, before assembling the crankshaft in the crank  
30 chamber, the outer bearing and then the agitator or counterweight are properly positioned  
around the cantilevered end of the crankshaft. The counterweight is provided with an  
access aperture in order to allow a tool to appropriately contact the adjacent bearing and  
50

5 the crankshaft. In this way, as the crankshaft is placed into the crank chamber, the bearing is not damaged and the crankshaft is properly positioned.

10 In another aspect of the present invention, the combustion chamber is adapted to enhance swirl of the air/fuel mixture to increase efficiency of the engine. Preferably, a  
5 spark plug is positioned closer to the exhaust valve than the intake valve to also improve engine efficiency, and reduce the likelihood of self-ignition within the engine.

15 In another aspect of the present invention, the engine housing is designed in such a way so as to permit two engine housings to be produced using only one die tool and one die casting machine. This also reduces capital costs and manufacturing expenses.

20 In another aspect of the present invention, a starter assembly is attached to the rear of the engine and is designed to utilize a crankshaft pin which is integral with the crankshaft. The crankshaft pin is the contact point for the internal rotation of the crankshaft in order to start the engine.

25 In another aspect of the present invention, the blower housing has an inwardly  
15 extending hub. The hub fits over the crankshaft. The starter assembly slides onto the hub. A star washer or the like is placed over the hub so as to prevent the axial movement of the starter assembly, particularly the pulley. This arrangement eliminates the need for  
30 separate mounting bosses and fasteners which are normally needed to attach the starter assembly to the blower housing and which typically block the cooling air flow by the fan.

35 In another aspect of the present invention, a shroud is provided to at least partially surround the engine housing. The shroud is provided with a pair of opposed channels. A fuel tank having opposed, outwardly extending shoulders is held by the shroud as the shoulders are received by the respective channels. Preferably, a filler material is  
25 positioned between each of the channels and respective shoulders so as to provide a more snug fit between the shroud and the fuel tank.

40 In a preferred embodiment, a fuel line includes a fuel filter attached to the end of the fuel line disposed within the fuel tank. The fuel filter acts as a weight. During  
45 operation of the engine, as the engine is tipped in different orientations, the weighted fuel line swings to the bottom of the fuel tank so that fuel is always picked up by the fuel line  
30 regardless of the orientation of the engine.

50 In one aspect of the present invention, the shroud includes an opening around the intake port. An intake isolator is provided having an air/fuel passageway extending therethrough. The intake isolator is mounted to the engine housing so that the air/fuel

5 passageway of the intake isolator is aligned with the intake port. Further, the intake  
isolator is positioned within the opening of the shroud to substantially ensure that cooling  
10 air passing between the engine housing and the shroud cannot escape through the opening  
in the shroud. The intake isolator is also used to insulate the intake air/fuel mixture from  
5 the surrounding environment to the extent feasible to ensure that the air/fuel ratio remains  
substantially correctly calibrated. In one embodiment of the present invention, a  
carburetor is interconnected with the intake isolator.

15 In one aspect of the present invention, the shroud includes a plurality of raised  
portions on one side thereof. If desired, the engine can be placed on the ground to rest on  
20 the raised portions. This could be useful, for example, on a trimmer when the user desires  
to change the cutting line located on the end of the shaft which is spaced a significant  
distance from the engine.

25 In another aspect of the present invention, the engine housing includes a back plate  
which is adjacent to a flywheel. Preferably, the crankcase, the cylinder and the back plate  
15 are cast as a single component, thereby reducing manufacturing and assembly costs, and  
thereby limiting the overall size of the engine housing. In a preferred embodiment, the  
engine housing further includes at least one fin integrally formed thereto. The fin extends  
30 from the back plate and beneath the crankcase to increase the stability between the back  
plate and the crankcase. The fin also is adapted to help cool the engine housing,  
20 particularly, the crankcase.

35 In another aspect of the present invention, a muffler is connected to the engine  
housing. The muffler includes a boss which extends into the exhaust port. In one  
embodiment, the engine housing includes an angled, stepped sealing surface located in the  
exhaust port. The end of the muffler boss mates against the exhaust port sealing surface to  
40 substantially prevent the exhaust from undesirably escaping into the surrounding  
atmosphere. Preferably, a sealing gasket is positioned between the end of the boss and the  
exhaust port sealing surface to even better prevent the exhaust from undesirably escaping  
into the atmosphere. In another embodiment, the muffler boss is surrounded by a portion  
45 of the exhaust port to define a clearance between the outside liner of the boss and the  
adjacent surface of the exhaust port. A gasket is positioned between the muffler and the  
30 engine housing to seal the clearance space between the muffler and the engine housing so  
as to prevent exhaust from undesirably escaping into the atmosphere. In a preferred

5 embodiment, the gasket is an enlarged gasket which also serves as a heat shield between the engine housing and the user.

10 In one aspect of the present invention, the muffler includes a pair of outer shells having a pair of mounting bolt holes extending therethrough for receiving a pair of  
5 mounting bolts. A pair of bolt receiving bores are located on opposite sides of the exhaust port in the engine housing. This arrangement ensures that the muffler will be securely attached to the engine housing in a stable manner. In a preferred embodiment, the muffler  
15 includes an inner shell sandwiched between the outer shells. The inner shell is a baffle plate adapted to reduce the amount of exhaust admitted into the atmosphere. The inner  
20 shell also includes a pair of mounting bolt holes to receive the mounting bolts. In yet another preferred embodiment, one of the outer shells includes a shoulder extending around an edge of the outer shell. The other outer shell includes a hook-shaped flange  
25 extending around an edge of the outer shell. The hook-shaped flange of the one outer shell receives the shoulder of the other outer shell upon assembly of the muffler. The assembly  
15 is such that if exhaust leaks out of the muffler, the exhaust will leak away from the engine housing so as not to substantially heat the engine housing.

30 In one aspect of the present invention, the four-stroke internal combustion engine includes an engine housing having an integrally formed crankcase, cylinder and flywheel back plate. The flywheel back plate includes at least one mounting boss on one side and at  
20 least one other mounting boss on an opposite side. An assembly fixture is utilized to hold the engine housing during assembly of the engine. Each mounting boss on the flywheel back plate receives a separate pin of the assembly fixture to secure the engine housing to  
35 the assembly fixture. A shroud is provided to at least partially surround the engine housing. The shroud includes at least two slots such that the slots surround the pins of the  
40 assembly fixture when the shroud is positioned around the engine. The shroud can then be firmly attached to the engine. After the shroud is attached to the engine, the pins can be removed from the mounting bosses. In this manner, the engine can be substantially  
25 completely assembled while the engine is mounted to the assembly fixture.

45 Accordingly, it is a principal feature of the present invention to provide a four-  
30 stroke internal combustion engine which includes a simple and inexpensive lubricating system which enables the engine to be functional in various operational attitudes.

50 It is a feature of the present invention to provide a four-stroke engine incorporating the foregoing features and yet also simple and easy to manufacture and assemble.

Other features and advantages of the invention will become apparent to those skilled in the art upon review of the following detailed description, claims and drawings.

### **BRIEF DESCRIPTION OF THE DRAWINGS**

FIG. 1 is an exploded perspective view of a four-stroke internal combustion engine according to the present invention.

FIG. 1A is a perspective view of the four-stroke engine of FIG. 1 illustrating the engine as assembled for use with, e.g., a power trimmer.

FIG. 2 is a cross-sectional end view and a partial schematic view of the engine of FIG. 1 taken along line 2-2 of FIG. 3.

FIG. 3 is a cross-sectional side view of the assembled engine of FIG. 1.

FIG. 4 is an enlarged view of a portion of the engine shown in FIG. 3 illustrating the rotational relationship between a cam gear and a crank gear, a portion of a lubricant flow path, and a portion of a breather system for the engine shown in FIG. 1.

FIG. 5 is an enlarged view of a portion of the engine shown in FIG. 3 illustrating a piston in its bottom dead center position.

FIG. 6 is a schematic representation illustrating another aspect of the present invention which concerns the attachment of a connecting rod to a piston and a crankshaft.

FIG. 7 is a perspective front view taken along line 7-7 of FIG. 9 illustrating a counterweight positioned adjacent to a main bearing of the crankshaft.

FIG. 7A is a side view of the counterweight of FIG. 7.

FIG. 7B is another perspective view of the counterweight of FIG. 7.

FIG. 8 is a perspective view illustrating an agitator cooperating with a scraper found on a wall within the engine cavity in order to regulate the amount of lubricant which comes into contact with the agitator.

FIG. 8A shows the rotational movement of the agitator of FIG. 8 and how the scraper controls the lubricant which comes into contact with the agitator.

FIG. 9 is a schematic representation of another aspect of the present invention illustrating the positioning of a crankshaft within a crank chamber disposed in an engine housing.

FIG. 10 is a partial schematic view of a top portion of the engine housing taken along line 10-10 of FIG. 3 illustrating the spatial relationship between a combustion chamber, a piston bore, an intake valve and an exhaust valve.

5 FIG. 11 is a partial schematic view of a cylinder head taken along line 11-11 of FIG. 3 illustrating the spatial relationship between the combustion chamber, the piston bore, the intake valve, the exhaust valve and portions of a spark plug.

10 FIG. 12 is a schematic view illustrating the path of an air/fuel mixture through an intake system to the combustion chamber and the path of the exhaust out of the combustion chamber through an exhaust system in an engine according to the present invention.

15 FIG. 13 is a cross-sectional partial schematic view of an engine according to the present invention showing the state of the lubricant in the crank chamber and an oil reservoir when the engine is in an upside down state.

20 FIG. 14 is a cross-sectional view of another embodiment of the present invention showing a starter assembly attached to the rear of a four-stroke internal combustion engine.

25 FIGS. 15-18 are schematic representations of two engine housings which are capable of being produced using one die tool and one die casting machine.

FIG. 19 is a schematic view of a power trimmer in which another four-stroke internal combustion engine according to the present invention is employed.

30 FIG. 20 is a perspective view of a shroud which at least partially surrounds an engine, wherein the shroud is adapted to enhance overall assembly operations of the engine.

35 FIG. 21 is an exploded partial perspective view of the four-stroke engine of FIG. 19.

FIG. 22 is another exploded partial perspective view of the four-stroke engine of FIG. 19.

40 FIG. 23 is a perspective view of an engine housing with a muffler attached thereto.

FIG. 24 is an exploded perspective view of FIG. 23.

FIG. 25 is a perspective view illustrating the flywheel end of the engine housing of FIG. 23.

45 FIG. 26 is an enlarged partial cross-sectional view taken along line 26-26 of FIG. 23 illustrating a connection between the engine housing and muffler of FIG. 23.

50 FIG. 27 is an alternative connection between the engine housing and muffler of FIG. 26.

FIG. 28 is a perspective view of the engine housing of FIG. 23 without the muffler.

FIG. 29 is a front view of an intake isolator as shown in FIG. 22 and FIG. 20.

FIG. 30 is a cross-sectional view of the intake isolator of FIG. 29.

FIG. 31 is a partial cross-sectional side view of the assembled engine of FIGS. 21 and 22.

FIG. 32 is an enlarged view of a portion of the engine shown in FIG. 31 illustrating a piston in its bottom dead center position.

FIG. 33 is an enlarged view of the relationship between the shroud and starter assembly in terms of retaining the starter assembly on the shroud.

FIGS. 34-38 illustrate various views of the starter pulley shown in FIG. 33.

FIGS. 39-40 are schematic representations of two engine housings which are capable of being produced using one die tool and one die casting machine.

Before the embodiments of the invention are explained in detail, it is to be understood that the invention is not limited in its application to the details of construction and the arrangements of components set forth in the following description or illustrated in the drawings. The invention is capable of other embodiments and of being practiced or of being carried out in various ways. Also, it is to be understood that the phraseology and terminology used herein is for the purpose of description and should not be regarded as limiting.

#### **DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS**

Illustrated in FIG. 1A of the drawings is a four-stroke internal combustion engine 20 according to the present invention. The engine 20 drives a conventional shaft typically housed in a shaft tube 22 which in turn drives an implement having a rotary head, cutting filament or blade, rotary impeller, or the like, depending on the type of power tool in use (see, e.g., FIG. 19). The shaft arrangement shown in FIG. 1A (and FIG. 19), typically used in conjunction with a hand-held power trimmer, is used for illustrative purposes only and it should be understood that other power tools such as those mentioned previously herein are capable of utilizing the four-stroke engine of the present invention. In other words, generally, the engine according to the present invention is preferably used in an orientation where the implement or working tool has an axis which is substantially parallel with a crankshaft axis. The engine according to the present invention may also be orientated with the crankshaft being horizontal or vertical. The engine according to the present invention is particularly well suited for those applications in which high RPMs,



5 e.g., 3,000 RPMs up to 7,000-8,000 RPMs or more, may be required and in which an  
output of less than 1 to over 6 horsepower may be supplied. Importantly, whichever type  
of power tool is used in combination with the four-stroke engine according to the present  
10 invention, the engine is capable of working, at least temporarily, in substantially any  
5 operational position of the power tool.

Illustrated in FIG. 1 of the drawings is an exploded perspective view showing  
various components of the four-stroke internal combustion engine 20 according to the  
15 present invention. Shown in FIG. 1 is a side valve or "L" head engine in which the  
various features of the present invention are employed. Side valve engines are sometimes  
10 referred to as "L" head engines because of the positional relationship of an intake valve  
and an exhaust valve with respect to a combustion chamber. As will be apparent below,  
20 the "L" is in reference to the path taken by an air/fuel mixture and the exhaust through  
respective valves and ports found in the engine body. Also, importantly, in an "L" head  
engine, the intake valve port and the exhaust valve port are located in the engine housing,  
25 not in the cylinder head which is generally common to overhead valve or overhead cam  
engines.

Before describing in detail the various features of the present invention, the  
components shown in FIG. 1 are identified for the sake of clarity. Shown are an ignition  
30 coil screw 24 used to attach an ignition coil (not shown) to the engine 20; shroud screws  
27 attach shroud 26 to an engine housing 28; cover screws 30 attach sump cover 32 and  
20 sump cover gasket 34 to the engine housing 28 in order to seal one end of the engine  
housing 28; cylinder head screws 36 attach cylinder head 38 and cylinder head gasket 40  
35 to the engine housing 28 thereby at least partially defining a combustion chamber 39 (FIG.  
2); carburetor 42 and muffler 44 are appropriately connected to the engine 20; carburetor  
25 42 cooperates with intake port 41 and air cleaner or filter 43 (FIG. 2); muffler 44  
40 cooperates with exhaust port 45; flywheel 46 which includes an integral fan (not shown) is  
positioned between the shroud 26 and engine housing 28 with the help of a flywheel key  
(not shown) in order to cool the engine 20 during operation; piston 48 is received by piston  
45 bore 50 within engine housing 28; intake valve 52 and exhaust valve 54 are positioned  
30 adjacent piston bore 50 within engine housing 28; intake valve seat 56 and exhaust valve  
seat 58 are placed within engine housing 28 to cooperate with the respective heads of  
valves 52 and 54; valve springs 60 are placed in a valve spring chamber and held within  
50 the valve spring chamber by valve spring keepers 62; the valve spring chamber is sealed

5 by valve cover 64 and valve cover gasket 66; crankshaft bearing 68, crankshaft bearing 70,  
worm-helical or spiral gear 74, counterweight 76, crank pin 78 and crankshaft 80 are part  
of crankshaft assembly 82; counterweight 76 includes an aperture 77; connecting rod 84  
10 includes connecting rod bearings 86 and 88; one end of connecting rod 84 fits over crank  
5 pin 78 and a wrist pin 90 connects the other end of connecting rod 84 to piston 48 by  
sliding in aperture 92 of piston 48; wrist pin 90 cooperates with access hole 93 of engine  
housing 28 when attaching the connecting rod 84 to the piston 48; cam shaft bushing 94,  
15 cam shaft bushing 96, cam shaft 98, cam lobes 100 and 102 (FIG. 2), and worm-helical or  
spiral gear 104 are part of cam shaft assembly 106; cam cap 108 and cam cap gasket 110  
10 are attached to engine housing 28 by cam cap screws 111 in order to seal cam shaft  
assembly 106; tappets 112 are properly positioned within the engine 20 to cooperate with  
20 valves 52 and 54; spark plug 114 is positioned in a spark plug hole within cylinder head  
38; divider 116 having slots 118, 120 and 122 is disposed within engine housing 28 and at  
least partially defines a crank chamber 124 and a lubricant or oil reservoir 126; and the  
25 15 piston bore 50 includes an extension 128 which at least partially extends into crank  
chamber 124.

Other components and features not clearly shown in FIG. 1 will be described  
30 below according to the features of the present invention.

FIG. 1 shows the carburetor 42 and the exhaust muffler 44 mounted on opposite  
20 sides of the engine housing 28. The carburetor 42 may be of any type of carburetor that is  
tippable such as a standard variable venturi diaphragm carburetor found in small gas  
35 engines, but a rotary valve carburetor available from, e.g., Walbro, is particularly well  
suited for use in an engine according to the present invention. The air cleaner or filter 43  
(schematically shown in FIG. 2) is mounted in or near an inlet of an intake passage in the  
25 carburetor 42. A fuel tank (not shown in FIG. 1) is mounted typically to a lower surface of  
40 the engine housing 28 and cooperates with the carburetor 42 so that fuel and air can be  
supplied to the intake port 41 (FIG. 2) in the engine housing.

The engine housing 28 is typically made of a lightweight aluminum alloy casting  
45 having a cylindrical bore or piston bore 50 formed therein. As noted, the piston bore 50 is  
30 configured to partially extend into the crank chamber 124 disposed within the engine  
housing 28. The area or space 136 (FIG. 13) between the extended piston bore 50 and  
divider 116 accepts volumes of the lubricant or oil during operation and storage to prevent  
50 too much lubricant or oil from entering the piston bore 50 or valve chamber 156 (FIG. 2).

5 The piston 48 is preferably coated, such as with an iron coating, or chrome plated so as to eliminate the need for a sleeve such as an iron sleeve within the piston bore 50.

Alternatively, piston bore 50 may include an iron cylinder sleeve.

10 The divider preferably includes bottom slot 118 which is located directly below the  
5 piston bore 50. Optional side slots 120 and 122 of the divider 116 may be located substantially directly across from one another at a predetermined distance from the bottom of the piston bore 50. The slots 118, 120 and 122 may be replaced with one or more holes  
15 or other apertures. As noted, the present invention is, of course, not limited to a particularly sized engine, but may be used with any internal combustion engine. The  
10 design considerations to determine the size and location of the slots or holes will be apparent below. The slots or holes should be configured for different sized engines taking  
20 into consideration the various features of the present invention.

FIGS. 8 and 8A show another aspect of the divider 116. In operation, as shown,  
the counterweight 76 is caused to rotate in one direction, usually, a clockwise direction.  
25 The bottom slot 118 includes opposing sides 130 and 132. The second side 132, with respect to the direction of travel of the counterweight 76, has a scraper 134 adjacent thereto. Preferably, the scraper 134 is positioned within .020 to .060 inches of the  
30 counterweight 76 when the counterweight 76 is located closest to the scraper 134. The scraper 134 limits or meters the amount of lubricant or oil (shown in broken dotted lines)  
20 which comes into direct contact with the counterweight 76. The scraper 134 helps to limit the amount of lubricant or oil which may be slung into the piston bore 50 during operation  
35 and reduces the wind resistance caused by excessive lubricant on counterweight 76. It should be noted that the scraper 134 could be configured in other ways. For example, bottom slot 118 in the divider 116 could be a diagonal slot such that the second side of the  
25 diagonal slot acts as the scraper 134 but the scraper is not a raised scraper as shown in FIGS. 8 and 8A. Alternatively, the bottom slot 118 in the divider 116 could be a straight slot without the use of a scraper.

As noted, FIG. 1 shows the oil reservoir 126 disposed within the engine housing 28  
45 defined by the divider 116 and the engine housing 28. The oil reservoir 126 is in fluid  
30 flow communication with the crank chamber 124, preferably through slots 118, 120 and 122. As shown, the oil reservoir 126 and the divider 116 are substantially curved or U-shaped. The divider 116 is preferably curved to direct lubricant away from the piston bore  
50 50 when the engine is tipped or inverted. The communication between the two chambers

5 124 and 126 allows for the crank chamber 124 to be properly lubricated during use as the lubricant is allowed to flow between the two chambers 124 and 126 during use, and for the lubricant to flow back into the oil reservoir 126 during storage so that an excessive amount of lubricant does not adversely flow into the piston bore 50.

10 Referring to FIGS. 1 and 3, crankshaft 80 is mounted within the crank chamber 124. The crankshaft worm-helical or spiral gear 74 drives the cam shaft assembly 106. Worm-helical or spiral gears are commonly known in the art and readily available from any number of gear manufacturers and suppliers. The crankshaft 80 and gear 74 may be manufactured in any number of known ways. However, injection molding the gear around  
15 a trim metal piece representing the crankshaft would work well according to the principles of the subject invention. The injection mold material may be a thermoplastic material or nylon material known to those skilled in the art. Another alternative is to provide a metal crankshaft with an enlarged cylindrical piece of metal on the crank where a worm-helical or spiral gear is intended to be located. The crankshaft then is subjected to a hobbing  
20 procedure in which the gear is machined on the crankshaft.

25 Still referring to FIGS. 1 and 3, bearings 68 and 70 are positioned around the crankshaft 80 in order to support the cantilevered crankshaft 80 when it is placed within the crank chamber 124. The bearings 68 and 70 are placed on opposite sides of the worm-helical or spiral gear 74 and on the same side of the piston bore 50. The inner bearing 68  
30 is smaller in diameter than the outer bearing 70. The bearings 68 and 70 are dimensioned in this manner such that the bearing pockets found in the crank chamber 124 are machined from one side of the engine housing 28 using only one tool. As can be appreciated by those skilled in the art, machining bearing pockets from one direction reduces equipment, time and expense usually associated with having to machine bearing pockets from  
35 different directions.

40 As shown in FIG. 1, counterweight 76 is mounted on one end of the crankshaft 80. FIGS. 7, 7A and 7B show in greater detail the shape and contours of the counterweight 76. As generally understood, the forces resulting from the operation of the piston 48, the connecting rod 84 and the associated components, are balanced by the counterweight 76.  
45 Depending on the size of the engine, more than one counterweight may be necessary. The counterweight 76 includes wing-tipped aerodynamic sides 138 and 140. Each wing-tipped side includes a back 142 that is positioned adjacent the main bearing 70 and a front 144 opposite the back 142. The wing-tipped sides 138 and 140 have contoured surfaces that  
50

5 extend from the back 140 to the front 142 of the counterweight 76. In this way, as will be  
more evident below, the aerodynamic shape of the counterweight 76 assists in reducing air  
resistance on the counterweight 76, generating the proper turbulence of air and lubricant  
10 within the internal cavity of the engine 20 and directing the lubricant within the internal  
5 cavity of the engine 20.

The tool access hole or aperture 77 of counterweight 76 (FIG. 7) is used for  
positioning the crankshaft 80 within the crank chamber 124. FIGS. 7 and 9 schematically  
15 show a tool 146 which is used to position the outer bearing 70, counterweight 76 and the  
crankshaft 80 within the crank chamber 124. Bearing 68 is press fitted into the crank  
10 chamber 124 and is adapted to receive one end of the crankshaft 80. Once the crankshaft  
80 has been manufactured, the bearing 70 is press fitted onto the crankshaft 80. The  
20 counterweight 76 is then fixed to the crankshaft 80. FIG. 7A illustrates a step 141 which  
provides a clearance of approximately .050 of an inch between the counterweight 76 and  
bearing 70. As shown in FIG. 7, only portions 69 of the outside race of the main bearing  
25 70 are exposed after the counterweight 76 is placed on the crankshaft 80. The access  
aperture 77 allows the tool 146 (FIG. 9) to contact the outside race of the main bearing 70  
in three spots when assembling the crankshaft 80 and associated components of the  
30 crankshaft assembly 82 into the crank chamber 124. A fourth leg of the tool (FIG. 9)  
contacts the cantilevered end of the crankshaft 80. This assembly helps ensure that the  
20 main bearing 70 will not be damaged upon assembly and the crankshaft 80 will be  
properly seated when inserted into the crank chamber 124.

FIG. 6 schematically illustrates how the connecting rod 84 is attached to the  
35 crankshaft 80 and piston 48. A custom shoulder bolt (not shown) may be utilized to affix  
the connecting rod 84 to the crank pin 78. The entire crankshaft assembly 82 (FIG. 1) is  
25 mounted within the crank chamber 124 (FIG. 3). The piston 48 is slid into the piston bore  
50 from the top of the engine housing 28. The aperture 92 in the piston 48 is lined up with  
the access aperture 93 in the engine housing 28. The connecting rod 84 is attached to the  
crankshaft assembly 82 by virtue of crank pin 78 and positioned within a cut out portion  
45 148 of the piston 48. The wrist pin 90 is inserted through the access hole 93 of the engine  
housing 28 into the access hole 92 of the piston 48 and through the bearing 86 of the  
30 connecting rod 84. Since the aperture 92 of the piston 48 is not drilled all the way through  
the piston 48, one end of the wrist pin 90 abuts an inner portion 150 of the piston 48. The  
50 wrist pin 90 can be held in place within the piston 48 by a star washer 151 inserted in the

5 open end of the aperture 92 (see also FIG. 5). Preferably, the wrist pin 90 and the crank  
pin 78 are hollow so as to reduce the overall weight of the reciprocating mass which in  
10 turn means a smaller counterweight with less weight is needed to balance the forces  
5 components improves vibration and makes the engine lighter for ease of operation.

The cam shaft 98, the eccentric style cam lobes 100 and 102 and the cam gear 104  
15 are shown as separate parts in FIG. 2. It should be noted that these parts can be injected  
molded as a single component using, for example, a thermoplastic or nylon material.  
Alternatively, certain components may be injected molded around a piece of trim metal to  
20 create the final assembly in similar manner to that contemplated for the crankshaft 80 and  
worm-helical or spiral gear 74.

FIG. 2 illustrates that the cam shaft 98 includes a passageway 152. FIGS. 2, 3 and  
4 show that a portion of the cam shaft assembly 106 (FIG. 1) adjacent the worm-helical or  
25 spiral gear 104 includes at least one radial aperture 154 exposed to the passageway 152  
and crank chamber 124. The passageway 152 and aperture 154 may be drilled into the  
proper portions of the cam shaft assembly 106 or molded therein. Essentially, the  
passageway 152 and the aperture 154 and cam shaft assembly 106 cooperate to provide a  
30 breather arrangement for the internal combustion engine which will be fully outlined  
below. Further, the radial aperture 154 may be found in a radial disc (not shown) attached  
20 to the cam shaft assembly 106 in close proximity to the gear 104 so as to be in  
communication with the passageway 152 and crank chamber 124.

35 As shown, the cam shaft 98 is located normal to the crankshaft 80. As can be  
appreciated by those skilled in the art, generally, in typical small gas engines, the cam  
shaft and the crankshaft are parallel to one another, not normal as shown according to the  
25 present invention. A parallel arrangement leads to a wider engine whereas the normal  
40 arrangement according to the present invention leads to a longer engine design with the  
crankshaft axis being substantially parallel to the longitudinal axis of the tool. A longer  
unit is particularly desirable for those hand-held applications such as power trimmers  
45 which require better balance for ease of operation. A wider engine may tend to cause the  
30 unit to want to rotate in the operator's hands during use.

FIG. 2 shows that cam shaft 98 sits in bushings 94 and 96 which rest in respective  
50 pockets within the crank chamber 124 in engine housing 28. The worm-helical or spiral  
gears 74 and 104 (FIGS. 2 and 3) are preferably designed such that when cam shaft 98 is

5 placed generally normal to crankshaft 80, the gears 74 and 104 mesh so that the rotational relationship between the crankshaft 80 to cam shaft 98 is 2 to 1.

10 The tappets 112 and the intake valve 52 and the exhaust valve 54 cooperate with cam shaft 98 (FIG. 2). Intake valve 52 and exhaust valve 54 are positioned within engine housing 28 adjacent to piston 48 and piston bore 50. The valves 52 and 54 are positioned  
5 such that the valve heads are closer to the centerline of the bore 50 as compared to the lower portions of the valves (FIG. 3). Preferably, the valves 52 and 54 are set at an angle of approximately between zero and eight degrees from a line parallel with the centerline of the bore. The intake valve seat 56 and the exhaust valve seat 58 are placed within engine  
15 housing 28 and cooperate with the heads of the respective valves 52 and 54 to alternately create a seal or an opening into the combustion chamber 39 with respect to the ports 41 and 45. The valve spring keepers 62 and valve compression springs 60 are positioned within the valve chamber 156 (FIG. 2). Each tappet 112 includes a respective head 158 which is in operational contact with respective cam lobes 100 and 102. As the cam shaft  
20 98 rotates by virtue of drive gear 74, cam lobes 100 and 102 properly engage tappets 112 such that valves 52 and 54 move up and down as is commonly understood by those skilled in the art.

30 With reference to FIGS. 2, 3 and 4, the crank chamber 124 is in communication with the valve chamber 156 via access passageway or aperture 160. Additionally, the valve chamber 156 is in communication with the piston bore 50 via access passageway or aperture 162. The passageways 160 and 162 allow valve chamber 156 and the  
35 components therein to receive lubricant during operation of the engine 20 in substantially any attitude. Additionally, during storage, with the aid of divider 116, the extended piston bore 50, and the slots 118, 120 and 122, a significant amount of lubricant will not remain or flow into the valve chamber 156.  
40

Referring to FIGS. 1, 2 and 3, cylinder head gasket 40 is positioned between the cylinder head 38 and the engine housing 28 so as to provide a proper seal between the two. Spark plug 114 projects into the enclosed combustion chamber 39. Spark plug 114 fires in  
45 combination with the ignition coil and magneto (not shown) to provide the necessary charge or high voltage signal to ignite the air/fuel mixture in the combustion chamber 39  
30 when the engine 20 is in operational mode.

FIGS. 10 and 11 schematically show, at least in part, the combustion chamber 39  
50 with respect to the intake valve 52, exhaust valve 54 and piston bore 50. As shown, the

5 combustion chamber 39 only partially extends over the piston bore 50. The orientation of  
the combustion chamber 39 and shape of the combustion chamber 39 enhances swirl in the  
10 mixing chamber 39 so as to provide a better air/fuel mixture to enhance ignition of the  
mixture. Also, the spark plug 114 is positioned closer to the exhaust valve 54 than it is to  
5 the intake valve 52. The electrode 164 is properly oriented to provide a firing spark.  
Placing the spark plug 114 nearer the exhaust valve 54 allows the hotter air/fuel mixture to  
be burned sooner by the spark ignited flame front. This will reduce the self-ignition  
15 tendency of the hotter air/fuel mixture at the exhaust side of the combustion chamber 39.  
If the spark plug 114 is positioned closer to the intake valve 52, there is a risk of having  
20 two combustions, resulting in a loss of power.

As shown in FIG. 2, the intake port 41 and the exhaust port 45 are located 180  
20 degrees apart from each other. The position of the valves 52 and 54 is a result of the  
substantially normal arrangement of the cam shaft 98 and crankshaft 80 and allows the  
ports 41 and 45 to be positioned on opposite sides of the engine housing 28. This provides  
25 an additional feature of operator safety. For example, when using a power trimmer, the  
exhaust port 45 and muffler 44 (FIG. 1) are positioned farther away from the operator  
during use. Another advantage of placing the ports 41 and 45 as far apart as possible is to  
30 reduce heat migration from the exhaust port 45 to the intake port 41 which, if did occur,  
could result in hot restart vapor lock issues, or difficulty in calibrating the air/fuel ratio.

FIG. 12, with reference to FIGS. 2 and 10 as needed, shows a schematic  
20 representation of the path traveled by the air/fuel mixture and exhaust through the engine  
20. The air/fuel mixture enters the intake port 41, travels past the intake valve 52, and into  
35 the combustion chamber 39. The engine 20 combusts the air/fuel mixture in order to  
generate power, and the remaining exhaust travels past the exhaust valve 54 and out the  
exhaust port 45. The arrangement of the cam shaft 98 and the crankshaft 80 is also shown  
40 to illustrate how such an arrangement contributes to the overall scheme associated with the  
air/fuel and exhaust paths through the engine 20.

An important feature of the present invention is that the four-stroke engine  
45 according to the present invention is capable of use in substantially any position. A  
problem with prior conventional four-stroke engines is that if the engine is substantially  
30 tilted, the lubricant will run into undesirable locations, such as the carburetor, thereby  
causing the engine to malfunction or cease working altogether. The four-stroke engine  
50



5 according to the present invention is designed to solve this problem and other problems typically associated with conventional four-stroke engines.

10 The oil or lubricant reservoir 126, the crank chamber 124, the piston bore 50, and the valve chamber 156 include strategically placed slots, passageways, or apertures so as  
5 to enable various working components within the engine to be lubricated at virtually all times during operation. Additionally, in cooperation with the divider 116, the counterweight 76 has been designed such that only a proper amount of lubricant comes  
15 into contact with the counterweight 76. The design of the counterweight 76 also allows the counterweight to meter the amount of lubricant that finds its way to the main bearing  
10 70 so as not to flood that part of the crank chamber 124 encapsulating the gears 74 and 104. This also will help prevent too much lubricant from entering the valve chamber 156  
20 through passageway 160 and 162. Moreover, the piston bore 50 and divider 116 have been designed to ensure that the lubricant has a place to go regardless of whether the engine is operating or being stored, so as not to foul the internal components of the engine.

25 15 The piston bore 50, connecting rod 84, the crankshaft assembly 82, the cam shaft assembly 106, and the valve chamber 156 and the components therein all require some lubrication. It is a feature of the present invention to use a minimal amount of lubricant or  
30 oil to lubricate the engine. This is accomplished in a number of ways. First, the highest part that needs lubrication, considering when the engine is in an upright (spark plug up)  
20 condition, is the valve chamber 156. Second, the roller bearings 86 and 88 for the connecting rod 84 require less lubrication versus a solid shaft with aluminum bushings.  
35 Third, since the lubricant will follow the path of least resistance, the divider 116, the counterweight 76 and the various slots, apertures and passageways previously mentioned help direct the lubricant to particular areas of the engine depending on the attitude of the  
25 engine.

40 In an upright non-operating position, lubricant or oil is stored within the oil or lubricant reservoir 126. In this position and in this state, the level of the lubricant is preferably below the bottom slot 118 in the divider 116. During operation, the  
45 reciprocating movement of the piston 48 creates pressure pulses within the internal cavity of the engine 20. The lubricant moves in response to the movement of the piston 48. The counterweight 76 agitates the lubricant or oil and blow-by gas within the inside cavity of  
30 the engine 20. As the piston 48 travels in its downward direction during the intake and power strokes, the lubricant is forced through the main bearing 70 to lubricate the bearings  
50

5 70 and 68, the worm-helical or spiral gears 74 and 104, the crankshaft 80, the cam shaft 98  
and the bushings 94 and 96 due to increased pressure in the engine cavity. The action of  
the cam gear 104 will cause some lubricant to enter aperture 160 and migrate to the valve  
10 chamber 156. Moreover, any oil found in piston bore 50 could be pushed into aperture  
5 162 to also lubricate the valve chamber 156. On the upward strokes, i.e., the compression  
and exhaust strokes, the lubricant will be drawn back over the just mentioned areas to  
further lubricate the components due to a partial vacuum in the engine cavity. The  
15 reciprocating movement of the piston 48 moves the lubricant back and forth within the  
internal cavity of the engine 20. The invention does not require a control valve to control  
10 movement of the lubricant.

20 There are at least a couple of aspects to consider when discussing lubricating the  
engine 20. First, there is resistance or energy lost as the counterweight 76 agitates the  
lubricant and blow-by gas. Second, it is undesirable to supply too much lubricant to the  
piston bore 50 and the valve chamber 156 which, if did occur, could result in damage to  
25 the engine 20.

As noted, since the static oil level is preferably below the bottom slot 118 in an  
upright condition, the counterweight 76 preferably does not dip directly into the lubricant,  
although direct dipping could be used. The more direct contact made with the lubrication,  
30 the more energy that is lost from the engine 20. The least amount of lubricant resistance is  
desired. As mentioned, the counterweight 76 is designed to throw the lubricant away from  
20 the main bearing 70 and towards the sump cover 32. The design of the counterweight 76  
also limits the amount of lubricant slung into the piston bore 50. In this way, only a limited  
35 amount of oil will find its way to the valve chamber 156. The counterweight 76 is  
designed to reduce the amount of drag that the counterweight 76 has when it is rotating  
25 through and churning up the lubricant. In addition, the counterweight 76 design reduces  
windage which creates a more efficient engine. It should be noted that although the  
counterweight 76 is shown and described as the device which agitates the lubricant and  
blow-by gas within the internal cavity, a separate agitator may be provided to accomplish  
45 the same results. Such an agitator may be a splasher or mixer attached to the rotating  
30 crankshaft or connecting rod, or caused to rotate in any number of other ways.

In an upside down (spark plug down) position such as that shown in FIG. 13, the  
50 extended piston bore 50, the divider 116, the slots 118, 120 and 122, and the passageways  
160 and 162 (FIGS. 2 and 3) ensure that the engine will continue to function properly, for

5 at least a limited amount of time, or be capable of storage in this position without fouling  
the engine. During operation, the changing pressure pulses, the blow-by gas and the  
10 agitator 76 will cause the lubricant to be mixed and moved inside the cavity of the engine  
20. Although some oil will be flung into the piston bore 50, not a significant amount will  
5 go there. Also, it should be noted that the access passageway 162 is located such that the  
oil ring 166 in the piston 48 does not travel over or past the passageway 162 as the piston  
15 48 reciprocates within the piston bore 50 (FIG.5). Otherwise, it would be possible for  
lubricant found within the valve chamber 156 to find its way into the combustion chamber  
39, thereby burning off the lubricant and creating excess emissions.

10 The crank chamber 124 includes the area or space 136 between the extended piston  
bore 50 and divider 116 for receiving oil or lubricant when the engine is tilted or inverted  
20 as representatively shown in FIG. 13. During storage, the slots 118, 120 and 122 will  
allow most of the oil to remain in the oil reservoir 126, and the area 136 between the  
divider 116 and the piston bore 50 will hold most of the remaining lubricant. Any oil left  
25 15 in the valve spring chamber 156 during use is thought to be negligible and will not  
significantly affect the operation of the motor. Importantly, because of the positioning of  
the slots 120 and 122 above the oil in the inverted position, the valve chamber 156 will not  
be able to receive any significant amount of oil.

30 To further explain certain features of the present invention, the oil reservoir 126  
20 should be in communication with the crank chamber 124 so as to allow for proper  
lubrication of the engine 20 in substantially any operational position. The various  
35 described slots, passageways, holes and apertures perform at least two functions. First, if  
the engine 20 is operating in a sideways condition, the slot 120 or 122 in the divider wall  
116 facing down towards the ground allows oil to travel into the crank chamber 124 with  
25 the pressure pulsations in a manner similar to when the engine is in an upright state during  
which lubricant moves through the bottom slot 118. Second, if for whatever reason, a  
40 significant amount of lubricant finds its way to the crank chamber 124 during operation  
and the engine 20 is turned off and turned upside down or sideways for storage, the side  
45 slots 120 and 122 allow oil to migrate from the crank chamber 124 to the oil reservoir 126  
30 so as to prevent the piston bore 50 and valve chamber 126 from undesirably receiving a  
significant amount of lubricant.

50 Another important feature of the present invention is to be able to vent blow-by gas  
from the crank chamber 124 by separating the blow-by gas from the lubricant/blow-by gas

5 mixture. As described, the cam shaft 98 is provided with a hollow passageway 152 and properly positioned radial passages 154. With reference to FIG. 2, one end of the cam shaft cover 108 includes a nipple 168 which is attached to a flexible hose 170 (schematically shown). Although not shown, there may be an oil seal placed between the cam cover 108 and engine housing 28. As the pressure pulse forces the lubricant/blow-by gas mixture through the main bearing 70, the blow-by gas is driven into the radial holes 154 and passageway 152 while the oil is prevented from passing through the holes 154 as a result of the centrifugal action of the operating cam shaft 98. The blow-by gas travels through the cam cover 108 and nipple 168 affixed to cam cover 108, through the flexible hose 170 and back into the intake of the carburetor 42. A check valve may be positioned between the end of the cam shaft 98 and the air intake system to maintain the negative pressure created within the engine.

FIG. 14 shows a cross-sectional view of the four-stroke engine according to the present invention with a starter mechanism 172 attached to the sump cover plate 32 with screws 30. A crankshaft adapter 174 is connected to crank pin 78. A clutch bearing 176 is press fitted around the crankshaft adapter 174. A starter shaft 178 is positioned around the clutch bearing 176 and is keyed or molded to the starter 180. An oil seal or O-ring 181 is placed around the starter shaft 178 to provide a seal between the starter mechanism 172 and the sump cover 32. A thrust washer or bearing 182 is placed on each side of the starter 180. Starter 180 is preferably a rewind starter having a pull cord 184. Locating the starter mechanism 172 or the sump cover 32 on the back of the engine 20 enables the operator to have easy access to the pull cord. Further, integrally connecting the starter to the piston 48 through connecting rod 84 and the crankshaft 80 through the crank pin 78 reduces the rope pull force needed to start the engine 20. Alternatively, other starter assemblies may be utilized.

FIGS. 15-18 depict a layout for the dies used to manufacture an engine housing according to the present invention. The engine housing is designed to permit two engine housings to be produced using one die tool and one die casting machine. The engine housing is designed to include walls which allow for the needed draft angles given different orientations for each engine housing within the die tool. The draft angles enable the engine housing to readily separate from the die. The engine housing is designed to permit slide tooling access (i.e., the piston and cam shaft bores) when two engine housings are fabricated from one tool. In FIGS. 15-18, the dies 188 and 190 are formed so that the

centerlines of the engine cylinder bores (which are parallel to direction C) are parallel to each other. Boxes 194 and 196 represent the edges of the tool. By positioning the dies in this manner, the inserts used to form the dies are inserted only along a few directions, i.e., in directions A, B and C. This die configuration reduces the overall space required to make the engine housings, while still enabling two engine housings to be made at the same time. The two die halves 188 and 190 are parted along parting line 192. It should be noted that the back wall of the engine housing is not shown and is separately formed and then fastened to the engine housing with bolts or other suitable fasteners. It is, however, possible that the back wall could be formed integral with the engine housing according to the principles set forth above. It should also be noted that the parting line 192 could be moved to another location. The draft angles of the engine housing outer walls would change accordingly so as to accommodate the new location of the parting line.

FIGS. 39-40 depict another embodiment of a layout for the die 529 used to manufacture an engine housing according to the present invention. In this embodiment, it is still possible to permit two engine housings to be produced using one die tool and one die casting machine. The die 529 is laid out in such a manner that the centerlines of the piston bores are parallel but in opposite directions. Further, both cavities are oriented such that the stationary bodies of material compose the internal features of the oil reservoir, the barrier wall and the inner crank chamber. The engine housing is designed to include walls of which are needed for draft angles parting line jumps, and slide shut-offs for the given orientation within the die layout. By orienting the die in such a prescribed manner, the inserts for the die pieces are inserted only along a few directions, i.e., in directions D, E, F and G. This embodiment of the die layout also serves to minimize the overall space necessary to manufacture the two-engine housings out of a single die.

With such a die layout, the datum targets or reference features for both cavities are created by the same piece of stationary material. By having these references on the same piece of stationary material, there is less variance to accommodate between the casting in the machining of the finished engine housing. This further translates into less variance in the finished-machined engine housing even though the casting is being derived from two separate cavities.

As shown, this embodiment also integrally creates the flywheel back-plate into the engine housing casting. It is further desirable to gate 531 the casting into the deck of the cylinder and route the gates parallel to directions F and G into the cavities.

5 The engine 20 shown in FIG. 1 has been described in such a manner to identify the various aspects of the present invention. However, the features of the present invention described above may be incorporated into other four-stroke internal combustion engine configurations. Moreover, the features identified above may be slightly modified to  
10 accommodate different engine designs. As such, FIGS. 19-40 illustrate another four-stroke internal combustion engine in which the features previously described may be employed and which incorporates additional inventive features not yet previously described. It should be noted that the features specifically described in relation to FIGS. 19-40 may be incorporated into the engine described in FIGS. 1-18, or other engines.

10 FIG. 19 illustrates a four-stroke internal combustion engine 300 according to the present invention. The engine 300 is shown as used in a power trimmer but may be used in other devices as described for the engine of FIG. 1.

Again, before describing in detail the various features of the present invention, the components shown in FIGS. 21 and 22 are identified for the sake of clarity. Many of the  
25 components are assembled in the same or similar manner as described in reference to FIG. 1 or as generally understood by those skilled in the art. Accordingly, the manner of assembly is not described in great detail below except if the manner of assembly pertains to specific features of the present invention. Greater detail of such features will be provided in reference to the drawings to follow when needed. Shown in FIG. 21 are spark  
30 plug 302; cylinder head screws 304; cylinder 306; cylinder head gasket 308; compression rings 310 and 312 and oil ring 313 which are appropriately positioned in annular slots located in piston 314; connecting rod 316 and connecting rod bearings, preferably needle roller bearings, 318 and 320; exhaust valve 322, intake valve 324, valve springs 326 and valve spring keepers 328; engine housing 330; valve cover 332 and associated screws 334;  
35 flywheel 336, crankshaft adapter 338, ignition coil 340, wiring assemblies 342 and 346, and screws 344 all of which are part of a starter assembly; muffler mounting bolts 350; muffler 352; and blower housing 348 which is part of an overall shroud further described below.

45 Shown in FIG. 22 are sealing O-ring 366 and oil gauge 367; intake gasket 368, intake isolator 369 and screws 370; carburetor gasket 372, carburetor 374 and O-ring 376; air filter assembly 378, screws 380 and air filter cover 382; wrist pin 384 and star washer wrist pin retainer 386; oil sealing ring 388, roller bearing 390, crankshaft 392 and counterweight 393; sump cover 394 and screws 396; muffler housing 398 which is part of  
50

5 an overall shroud further described below and mounting screws 400; tappets 402, cam shaft 404, cam shaft cover 406; screws 408 and breather tube 410; check valve 411; fuel tank 412 having fuel line 414, opposing shoulders 416; and filter material 418 which is placed around shoulders 416 as further described below.

10 5 Other components and features not clearly shown in FIGS. 21 and 22 will be described below. Moreover, the significance of any of the components shown in FIGS. 21 and 22 or their interaction, will be described below in conjunction with the principles of the present invention.

15 FIG. 23 more clearly shows the engine housing 330 with the muffler 352 attached thereto by mounting bolts 350. The engine housing 330 includes a crankcase 420 and a cylinder 422. The cylinder head 306 (FIG. 21), which at least partially defines a combustion chamber, is disposed adjacent to the cylinder 422. A crank chamber 426 is disposed within the crankcase 420. An oil reservoir 428 is also disposed within the crankcase 420 and is in fluid flow communication with the crank chamber 426, preferably, through slot 430 and opposing holes 432 (only one being shown) disposed in a divider 433. The divider 433 is disposed within the crankcase 420 and at least partially divides the crank chamber 426 and the oil reservoir 428. A plurality of holes 434 are provided in the engine housing 330 so that the sump cover 394 and sump cover gasket can be attached thereto. The engine housing 330 also includes an oversized wrist pin boss 436. The wrist pin boss 436 may be integrally formed with the divider 433. The function of the wrist pin boss 436 will be further described below. The engine housing 330 also includes a flywheel back plate 438 with at least one mounting boss 440, the function of which will be described below.

20 25 FIG. 24 is an exploded perspective view of FIG. 23 showing how the muffler 352 is connected to the engine housing 330. The cylinder 422 includes an exhaust port 442 and an intake port 444 (FIG. 25). Preferably, the intake port 444 and exhaust port 442 are elliptical in shape thereby enabling the overall height of the engine housing 330 to be reduced. This will naturally reduce the overall weight of the engine housing, which is an especially important factor for hand-held power tools. The walls of the ports 442 and 444 are provided with sufficient material so as to be able to support the weight of the engine housing 330 and cylinder head 306 disposed thereabove.

30 45 50 The muffler 352 includes a boss 446 which is preferably elliptical. The boss 446 extends into the exhaust port 442. Mounting bolts 350 extend through holes 448 in the

5 muffler 352 and into holes 450 formed in the cylinder 422. Preferably, the holes 448 are spaced apart and positioned on opposite sides of the exhaust port 442 to maximize the stability of the muffler 352 with respect to its connection to the cylinder 422.

10 FIGS. 26 and 27 are enlarged partial cross-sectional views taken along line 26-26 of FIG. 23 showing preferred alternative mounting connections between the muffler 352 and cylinder 422. FIG. 26 shows the engine housing 330 having an angled, step sealing surface 452 located in the exhaust port 442 of cylinder 422. The end 454 of boss 446 can mate against the exhaust port sealing surface 452 to substantially prevent exhaust from undesirably escaping into the environment. Preferably, a sealing gasket 456 is positioned 15 between the end 454 of the boss 446 and the sealing surface 452 to even better prevent the exhaust from escaping.

20 FIG. 27 shows the outside liner of the boss 446 of the muffler 352 surrounded by the surface 458 of the exhaust port 442, thereby defining a clearance space 460 therebetween. Although surface 458 is shown as an angled surface, it may take on other configurations so long as clearance space is provided between the muffler 352 and the exhaust port 442. A gasket 462 is positioned between the muffler 352 and cylinder 422 or engine housing 330 to seal the clearance space 460, thereby preventing exhaust from escaping into the atmosphere. Preferably, the gasket 462 is an enlarged gasket which also serves as a heat shield between the engine housing 330 and the muffler 352.

25 The muffler 352 (FIG. 24) preferably includes a pair of outer shells 464 and 466 having respective mounting bolt holes 448 for the mounting bolts 350. An inner shell or baffle plate (not shown) is preferably located between the outer shells 464 and 466. The inner shell also is adapted to allow the mounting bolts 350 to pass therethrough. The baffle plate is designed to reduce noise. Outer shell 464 includes a shoulder 470 which extends around an edge of the outer shell 464. Outer shell 466 includes a flange (not shown) which extends around an edge of the outer shell 466. Upon assembly, the shoulder 470 receives the flange such that if exhaust does leak out of muffler 352, the exhaust will leak away from the engine. Although not shown, a deflector may be placed over the exhaust holes 372 (FIG. 23) of the muffler 352 to protect the operator from receiving a direct blast of exhaust.

30 Given the nature of the four-stroke engine according to the principles of the present invention, it is desirable to provide an economical engine with features which allow the engine to be easily assembled. One feature is to use the same engine housing 330 for



engines having different horsepower ratings, simply by changing the connecting rod 316 (FIG. 21) and thus, the length of the piston throw. To accomplish this feature, the oversized wrist pin boss 436 (FIG. 23) is provided. The wrist pin boss 436 can be machined at its upper end 474 to provide an access hole (not shown) in the crankcase 420 for a first piston throw, and the wrist pin boss 436 can be machined at its lower end 476 to provide an access hole (not shown) in the crankcase 420 for a second piston throw. After the wrist pin boss 436 is properly machined, the wrist pin 384 (FIG. 22) is inserted through the crankcase access hole and into the piston access hole to connect the piston 314 (FIG. 21) to the connecting rod 316 (FIG. 21). Accordingly, the same engine housing 330 can be used for different sized engines. FIG. 31 shows a completed assembly on such engine. FIG. 32 shows the piston 314 in its bottom most dead center position so that the wrist pin 384 can be appropriately positioned within the engine.

FIG. 28 is an enlarged view of the engine housing 330 of FIG. 24 without the muffler 352. As shown, the divider 433 defines a path 478 which extends substantially about the divider 433 and over the wrist pin boss 436. The path 478 allows lubricant found in the oil reservoir 428 to flow around a substantial portion of the divider 433 to further enhance the lubricating and storage features according to the principles of the present invention. The path 478 allows the amount of lubricant found on both sides of the divider 433 to equalize when the engine 300 is turned upside down. This further inhibits a substantial amount of the lubricant from migrating into the crank chamber 426.

Another feature which reduces assembly costs of the engine thereby reducing the overall cost of the engine relates to the manner of assembling a shroud to the engine housing. As noted with reference to FIG. 23, the flywheel back plate 438 is provided with at least one mounting boss 440. FIG. 25 is a perspective view of the engine housing 330 of FIG. 23 only from a different perspective. As shown, the opposite side of the flywheel back plate 438 also includes at least one mounting boss 480. Upon assembling the engine 300, an assembly fixture (not shown) is adapted to hold the engine 300. Each mounting boss 440 and 480 receives a separate pin (not shown) of the assembly fixture to secure the engine housing 330 to the assembly fixture. A shroud 482 (FIG. 20) is provided to at least partially surround the engine housing 330. Preferably, the shroud comprises the blower housing 348 (see also FIG. 21) and muffler housing 398 (see also FIG. 22). Shroud 482 includes at least one slot 484. Each slot 484 is designed to surround a respective pin of the assembly fixture extending out of the mounting bosses 440 and 480 when the shroud 482

5 is positioned around the engine housing 330. The shroud 482 can be attached to the engine housing 330 by threading screws 486 (FIG. 20) into respective holes such as hole 488 (FIG. 25) of the engine housing 330. Thus, the entire engine 300 can be substantially assembled while remaining attached to a single assembly fixture.

10 5 Another feature of the shroud 482 is that the muffler housing 398 preferably includes a plurality of raised portions 490 (FIG. 31). Thus, if desired, the engine 300 may be placed on the ground to rest on the raised portions 490. It should be noted that the blower housing 492' of FIG. 31 is slightly different from the blower housing shown in FIG. 20. The purpose of this is to show that various suitable configurations of the shroud 10 482 are possible without affecting the scope of the present invention.

20 As shown in FIG. 20, the shroud 482 is provided with an opening 494 which surrounds the intake port 444 (FIG. 25). An intake isolator 369 (FIG. 22) having an air/fuel passageway 496 (FIGS. 29 and 30) extending therethrough is provided. The intake isolator 369 is mounted to the engine housing 330 so that the air/fuel passageway 496 is aligned with the intake port 444. The intake isolator 496 is positioned within the opening 494 of the shroud 482 to substantially ensure that cooling air passing between the engine housing 330 and the shroud 482 cannot escape through the opening 494 in the shroud 482. Preferably, the intake isolator 369 includes an integrally formed back wall 498 and a side wall 500 (FIG. 22) to accomplish this feature.

20 To further reduce manufacturing costs, the crankcase 420, the cylinder 422 and the back plate 438 are cast as a single component. In a preferred embodiment, the engine housing 330 further includes at least one fin 502 integrally formed thereto (FIG. 28). The fin 502 extends from the back plate 438 and beneath the crankcase 420 for stability and cooling purposes.

25 Although the shroud 482 may be of many different designs consistent with the principles of the present invention, the shroud 482 is designed to hold the fuel tank 412. As best shown in FIG. 31, the shroud 482 is provided with a pair of opposed channels 504 (only one is shown). The outwardly extending shoulders 416 (see also FIG. 22) are received by the respective channels 504 so that the fuel tank 412 is held by the shroud 482. 45 The filler material 418 (see also FIG. 22), preferably a polyethylene, high-density, closed cell, high-temperature and gasoline-resistant foam material, is positioned between each channel 504 and the respective shoulder 416 to provide a tight fit between the shroud 482 and the fuel tank 412. The fuel line 414 (FIG. 22) includes a fuel filter 506 attached to the 50

5 end of the fuel line 414 disposed within the fuel tank 412. It should be noted that the extra line shown in FIG. 22 is a purge line. The fuel filter 506 acts as a weight such that during operation of the engine, if the engine is tipped, the weighted fuel line 414 swings to the bottom of the fuel tank 412 to ensure that fuel is picked up by the fuel line 414.

10 5 Another aspect of the present invention concerns the starter assembly 507 shown in FIG. 33. The blower housing 348 is provided with a hub 508 having an inwardly facing extension 510. The hub 508 is adapted to fit over the crankshaft 392 (FIG. 22) or crankshaft adapter 338 (FIG. 21). The starter assembly 507 which includes the pulley 516, rope 518 and spring 520 is positioned onto the hub 508. A star washer 514 is placed over the hub extension 510 so as to dig into the extension material. The star washer 514 holds the starter assembly 507 in place with respect to the blower housing 348. This arrangement eliminates the need for separate mounting bosses and fasteners typically needed to hold the starter assembly in place. Such mounting bosses and fasteners generally block the cooling air flow by a fan.

15 25 FIGS. 34-38 show various views of the pulley 516. The spring 520 (FIG. 33) is positioned on one side 522 of the pulley 516 having an appropriately shaped annular recess 524. The opposite side 526 of the pulley 516 includes a plurality of spokes 528 for engagement with a flywheel such as flywheel 336 shown in FIG. 21. The rope 518 includes a knot 530 on one end thereof which is held in a chamber 532 formed in a hub 534 of the pulley 516 beneath the pulley rope portion 536. The rope 518 extends through a hole 538 in the pulley rope portion 536 and is wrapped around the pulley 516. The other end of the rope 518 is attached to a starter handle 540 (FIG. 20).

30 35 The foregoing description of the present invention has been presented for purposes of illustration and description. Furthermore, the description is not intended to limit the invention in the form disclosed herein. Consequently, variations and modifications commensurate with the above teachings in skill or knowledge of the relevant art, are within the scope of the present invention. The embodiments described herein are further intended to explain the best modes known for practicing the invention and to enable others skilled in the art to utilize the invention as such, or other embodiments and with various modifications required by the particular applications or uses of the present invention. It is intended that the appended claims are to be construed to include alternative embodiments to the extent permitted by the prior art.

40 45 50 Various features of the invention are set forth in the following claims.

## Claims

5

10

15

20

25

30

35

40

45

50

55

**CLAIMS****WHAT IS CLAIMED IS:**

1. A four-stroke internal combustion engine, comprising:  
an engine housing including a crankcase and a cylinder;  
a cylinder head which at least partially defines a combustion chamber, said  
cylinder head disposed adjacent to said cylinder;  
an intake valve and an exhaust valve disposed within said engine housing;  
a crank chamber disposed within said crankcase;  
an oil reservoir disposed within said crankcase, said oil reservoir being in fluid  
flow communication with said crank chamber;  
an agitator located at least partially within said crank chamber, said agitator  
moving lubricant within said engine housing during operation of said engine; and  
a divider disposed within said crankcase, said divider at least partially dividing said  
crank chamber and said oil reservoir.

2. An engine according to claim 1, wherein said divider includes an opening,  
such that said crank chamber and said oil reservoir are in fluid flow communication  
through said opening.

3. An engine according to claim 2, wherein said divider further includes a  
second opening and a third opening, said second opening positioned substantially across  
from said third opening, said second and third openings being located at predetermined  
distances from the first opening, such that said crank chamber and said oil reservoir are  
also in fluid flow communication through said second and third openings.

4. An engine according to claim 1, wherein said engine housing further  
includes a cylinder side wall which at least partially extends into said crank chamber to  
define a lubricant receiving space between said divider and said cylinder side wall.

5. An engine according to claim 1, wherein said engine housing further  
includes a valve chamber in which said intake valve and said exhaust valve are disposed,  
said valve chamber being in fluid flow communication with said crank chamber.

5                   6.     An engine according to claim 1, wherein said engine housing further  
includes a cylinder side wall which at least partially extends into said crank chamber, and  
10                   a valve chamber in which said intake valve and said exhaust valve are disposed, said valve  
5                   chamber being in fluid flow communication with said crank chamber and said cylinder  
side wall.

15                   7.     An engine according to claim 1, further comprising:  
a cantilevered crankshaft having opposite ends, said crankshaft being substantially  
located within said crank chamber; and  
10                   wherein said agitator includes a counterweight which is interconnected with the  
cantilevered end of said crankshaft, said counterweight including a wing-tipped,  
20                   aerodynamic side which reduces windage resistance on said crankshaft and which slings  
the lubricant about said crank chamber as said crankshaft rotates during operation of said  
engine.

25                   15               8.     An engine according to claim 2, wherein said divider further includes a  
scraper located adjacent to said opening, said scraper at least partially extending into said  
30                   crank chamber, such that as said agitator rotates past said scraper during operation of said  
engine, said scraper meters the amount of lubricant which comes into contact with said  
20                   agitator.

35                   9.     An engine according to claim 8, wherein an end of said scraper is located  
approximately within the range of .020 to .060 inches from said agitator when said agitator  
rotates past said scraper.

25                   40               10.    An engine according to claim 1, further comprising:  
a cantilevered crankshaft substantially disposed within said crank chamber; and  
a cam shaft rotatably driven by said crankshaft, said cam shaft being located  
45                   substantially normal to said crankshaft.

30

50

55

5

11. An engine according to claim 10, further comprising:

a first valve tappet and a second valve tappet each tappet being associated with a respective valve, the valve tappets operatively engaging said cam shaft; and  
wherein the valves are disposed substantially normal to said crankshaft.

10

5

12. An engine according to claim 10, wherein said cam shaft has an axial

passageway and a radial aperture which communicates with said crank chamber and said passageway, and wherein said engine further comprises:

15

a breather tube having opposite ends, one end of said breather tube communicating with said passageway of said cam shaft and the other end of said breather tube communicating with an air intake system of said engine.

10

20

13. An engine according to claim 1, wherein said crankcase includes an access hole, and wherein said engine further comprises:

25

15

a cantilevered crankshaft substantially disposed within said crank chamber;  
a piston reciprocally operable within said cylinder, said piston including an aperture;

30

a connecting rod having opposite ends, one end of said connecting rod being pivotally attached to said crankshaft, and the other end of said connecting rod being pivotally connected to said piston; and

20

a wrist pin which is received in said aperture of said piston, said wrist pin passing through one end of said connecting rod so as to pivotally connect said connecting rod to said piston, wherein said access hole in said crankcase is aligned with said aperture in said piston during installation of said wrist pin into said piston and through the respective end of said connecting rod.

35

25

40

14. An engine according to claim 1, wherein said engine housing further includes an internal cylinder side wall, and wherein said crank chamber includes at least two bearing pockets, one pocket having a larger diameter than the other, wherein both of said bearing pockets are disposed on the same side of said internal cylinder side wall.

45

30

50

55

5           15.     An engine according to claim 14, further comprising:

          a cantilevered crankshaft having opposite ends, said crankshaft being substantially  
disposed within said crank chamber;

10           a first bearing positioned within one bearing pocket and a second bearing

5           positioned in the other bearing pocket, the bearings supporting said crankshaft; and

          wherein said agitator includes a counterweight which is connected to the  
cantilevered end of said crankshaft, said counterweight having a locating hole extending  
15           therethrough, said counterweight being positioned adjacent to one of the bearings, such  
that a tool extending at least through said locating hole of said counterweight so as to be  
20           evenly positioned around the bearing adjacent to such counterweight for proper insertion  
of said crankshaft into said crank chamber.

16.     An engine according to claim 1, wherein said engine housing further

includes a cylindrical side wall which at least partially defines a piston bore, such that said  
25           combustion chamber partially covers said piston bore and such that each valve disposed  
15           within said engine housing is substantially parallel with said piston bore so that said  
combustion chamber extends over top portions of the valves, and wherein said engine  
further comprises:

30           a spark plug located within said cylinder head, said spark plug positioned such that  
20           an electrode of said spark plug is located closer to said exhaust valve than to said intake  
valve.

17.     An engine according to claim 1, wherein said engine housing further

includes an internal cylindrical side wall which defines a piston bore and which has a  
25           centerline traveling therethrough, and wherein said engine housing also includes additional  
40           walls defining draft angles, said draft angles enabling the engine housing to be easily  
separated from a die.

18.     An engine according to claim 1, further comprising:

45           a cantilevered crankshaft having opposite ends, said crankshaft being substantially  
30           disposed in said crank chamber;

          a crankshaft pin operably connected to said crankshaft; and

50           a starter mechanism coupled to said crankshaft pin.



5

19. An engine according to claim 1, wherein said divider defines a path which extends about said divider, such that the lubricant in said oil reservoir is able to flow around a substantial portion of said divider.

10

5

20. An engine according to claim 1, further comprising:  
a shroud which at least partially surrounds said engine housing, said shroud including a pair of opposed channels; and  
a fuel tank having opposed outwardly extending shoulders, such that said shoulders of said fuel tank are received by said respective channels of said shroud.

15

10

20

21. An engine according to claim 20, further comprising:  
a filler material positioned between each of said channels of said shroud and each of said respective shoulders of said fuel tank.

25

15

22. An engine according to claim 21, wherein said filler material is a polyethylene, high-density, closed cell, high-temperature resistant foam which is also gasoline-resistant.

30

20

23. An engine according to claim 1, further comprising:  
a fuel tank; and

35

a fuel line having opposite ends, one end of said fuel line being disposed within said fuel tank, said fuel line further having a fuel filter attached to the end of said fuel line disposed within said fuel tank.

25

40

24. An engine according to claim 1, wherein said engine housing further includes a back plate which is adjacent a flywheel, and wherein said crankcase, cylinder and back plate are cast as a single component.

45

30

25. An engine according to claim 24, wherein said cylinder includes at least one fin integrally formed thereto, said fin extending from said back plate and beneath said crankcase.

50

55

5                   26.     An engine according to claim 1, wherein said cylinder includes an intake  
port and an exhaust port, wherein said intake port and said exhaust port are located on  
opposite sides of said engine housing, wherein said intake valve and said exhaust valve are  
10     in communication with said intake port and said exhaust port, respectively, and wherein  
5     said intake port and said exhaust port each have an elliptical shape.

                  27.     An engine according to claim 26, further comprising:  
15                   a shroud which at least partially surrounds said engine housing, said shroud having  
an opening around said intake port; and  
10                   an intake isolator having an air/fuel passageway therethrough, said intake isolator  
20     mounted to said engine housing such that said air/fuel passageway of said intake isolator is  
in alignment with said intake port, said intake isolator positioned within said opening in  
said shroud.

25                   15     28.     An engine according to claim 27, wherein said intake isolator includes an  
integrally formed back wall and side wall, wherein said back wall is adjacent said intake  
port and said side wall is substantially normal to said back wall.

30                   29.     An engine according to claim 27, further comprising:  
20                   a carburetor which is interconnected with said intake isolator.

35                   30.     An engine according to claim 26, further comprising:  
a muffler connected to said engine housing, wherein said muffler includes a boss  
which extends into said exhaust port.

25                   40     31.     An engine according to claim 30, wherein said engine housing includes an  
angled, step sealing surface located in said exhaust port, such that an end of said boss of  
said muffler mates against said sealing surface of said exhaust port.

45                   30     32.     An engine according to claim 31, further comprising:  
a sealing gasket located between said end of said boss and said sealing surface of  
said exhaust port.

50

55

5                   33.     An engine according to claim 30, wherein said boss of said muffler is  
surrounded by an outer portion of said exhaust port to define a clearance space between  
said muffler and said engine housing, and wherein said engine further comprises:  
10                   a gasket positioned between said engine housing and said muffler to seal said  
5     clearance space.

15                   34.     An engine according to claim 33, wherein said gasket is enlarged, and  
wherein the enlarged gasket provides a heat shield.

20                   35.     An engine according to claim 30, wherein said muffler includes a pair of  
outer shells having a pair of mounting bolt holes extending therethrough for receiving a  
pair of mounting bolts.

25                   36.     An engine according to claim 35, wherein said muffler includes an inner  
15     shell sandwiched between said pair of outer shells, said inner shell including a pair of  
mounting bolt holes extending therethrough for receiving the mounting bolts.

30                   37.     An engine according to claim 33, wherein one of the outer shells includes a  
shoulder extending around an edge of the outer shell, and the other outer shell includes a  
20     hook shaped flange extending around an edge of the outer shell, such that said hook  
shaped flange of the respective outer shell receives said shoulder of the respective outer  
35     shell.

40                   38.     An engine according to claim 1, further comprising:  
25     a shroud which at least partially surrounds said engine housing, and wherein said  
shroud includes a plurality of raised portions on one side thereof.

45

50

55

5           39. A four-stroke internal combustion engine adapted for assembly on an assembly fixture, said engine comprising:

10           an engine housing including an integrally formed crankcase, cylinder and flywheel back plate, said flywheel back plate including a mounting boss on one side thereof such  
5           that a pin of the assembly fixture is received by said mounting boss; and

15           a shroud which at least partially surrounds said engine housing, said shroud including a slot therein, such that said slot surrounds the pin of the assembly fixture when said shroud is positioned around said engine, and such that the pin can be removed from  
20           said mounting boss after said shroud is attached to said engine, said engine being substantially completely assembled while said engine housing is mounted to the assembly  
25           fixture.

40. A four-stroke internal combustion engine, comprising:

25           an engine housing having an oversized wrist pin boss, said boss being machinable to include at least a first aperture in one location and a second aperture in another location;  
15           a cantilevered crankshaft disposed within said engine housing;

30           a piston reciprocally operable within said engine housing, said piston including an aperture;

35           a connecting rod having opposite ends, one end of said connecting rod being pivotally attached to said crankshaft, and the other end of said connecting rod being  
20           pivotally connectable to said piston; and

40           a wrist pin which is passable through said first aperture in said boss into said aperture of said piston and into one end of said connecting rod to pivotally connect said connecting rod to said piston to provide a first throw of said engine, and which is also  
25           passable through said second aperture of said boss into said aperture of said piston and into one end of said connecting rod to pivotally connect said connecting rod to said piston to  
45           provide a second throw of said engine.

5  
10  
15  
20  
25  
30  
35  
40  
45  
50  
55

5

41. A four-stroke internal combustion engine comprising:

a crankshaft;

10

a blower housing having a hub which includes an extension, said hub adapted to fit over said crankshaft;

5

a starter assembly surrounded by said blower housing and positioned onto said hub extension, said starter assembly adapted to cooperate with said crankshaft to start the engine; and

15

an annular ring positioned over said extension to prevent axial movement of said starter assembly.

10

20

42. A method of assembling a four-stroke internal combustion engine,

comprising the steps:

providing an engine housing having an integrally formed crankcase, cylinder and flywheel back plate;

25

15

providing a mounting boss on said back plate;

mounting said engine to an assembly fixture by positioning a pin on the fixture into said mounting boss;

30

placing a shroud around said engine housing while said engine remains mounted to said fixture; and

20

attaching said shroud to said engine housing while said engine remains mounted to the assembly fixture.

35

43. An engine according to claim 12, further comprising:

a check valve positioned between said cam shaft and said air intake system of said

40

25

engine.

44. An engine according to claim 40, further comprising:

a star washer which is positioned adjacent to one end of said wrist pin and which is positioned in said aperture of said piston to prevent axial movement of said star washer.

45

30

50

55

5                   45.    An engine according to claim 39, wherein said flywheel back plate further  
includes a second mounting boss on an opposite side thereof, such that a second pin of the  
assembly fixture is received by said second mounting boss, and wherein said shroud  
10 further includes a second slot therein, such that said second slot surrounds the second pin  
5 of the assembly fixture when said shroud is positioned around said engine, and such that  
the second pin can be removed from said second mounting boss after said shroud is  
attached to said engine.

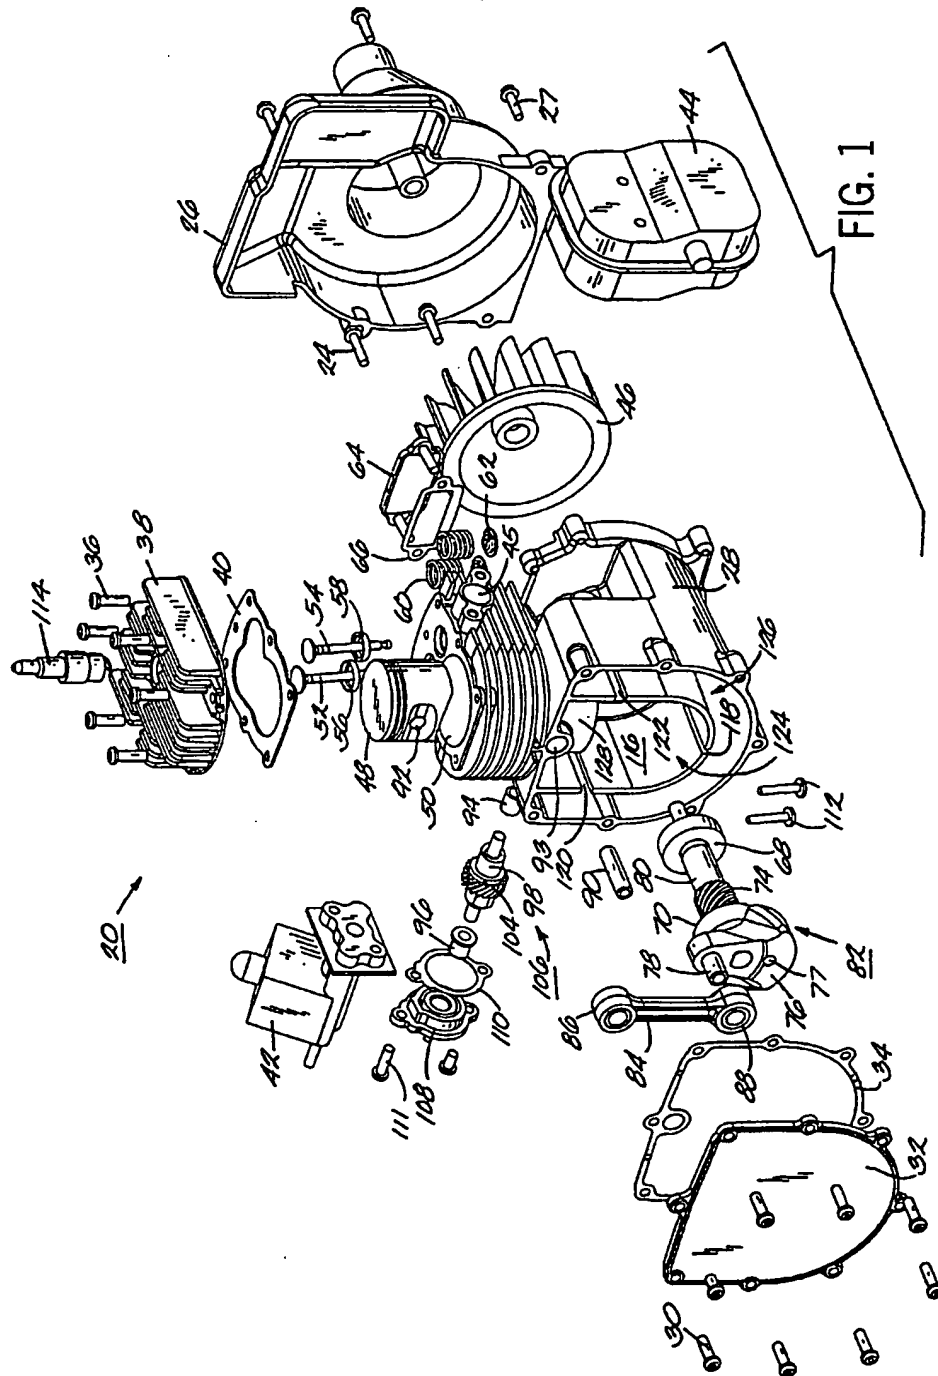
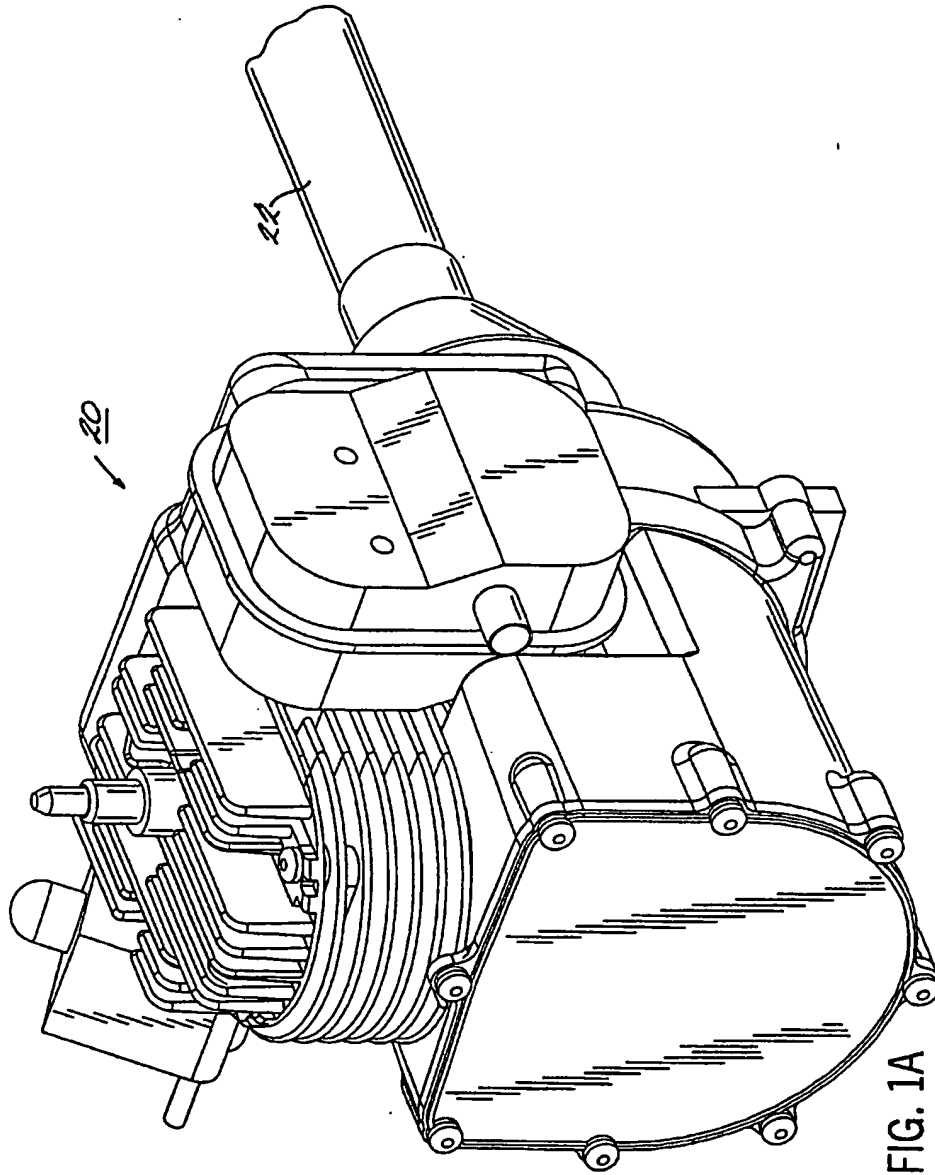


FIG. 1





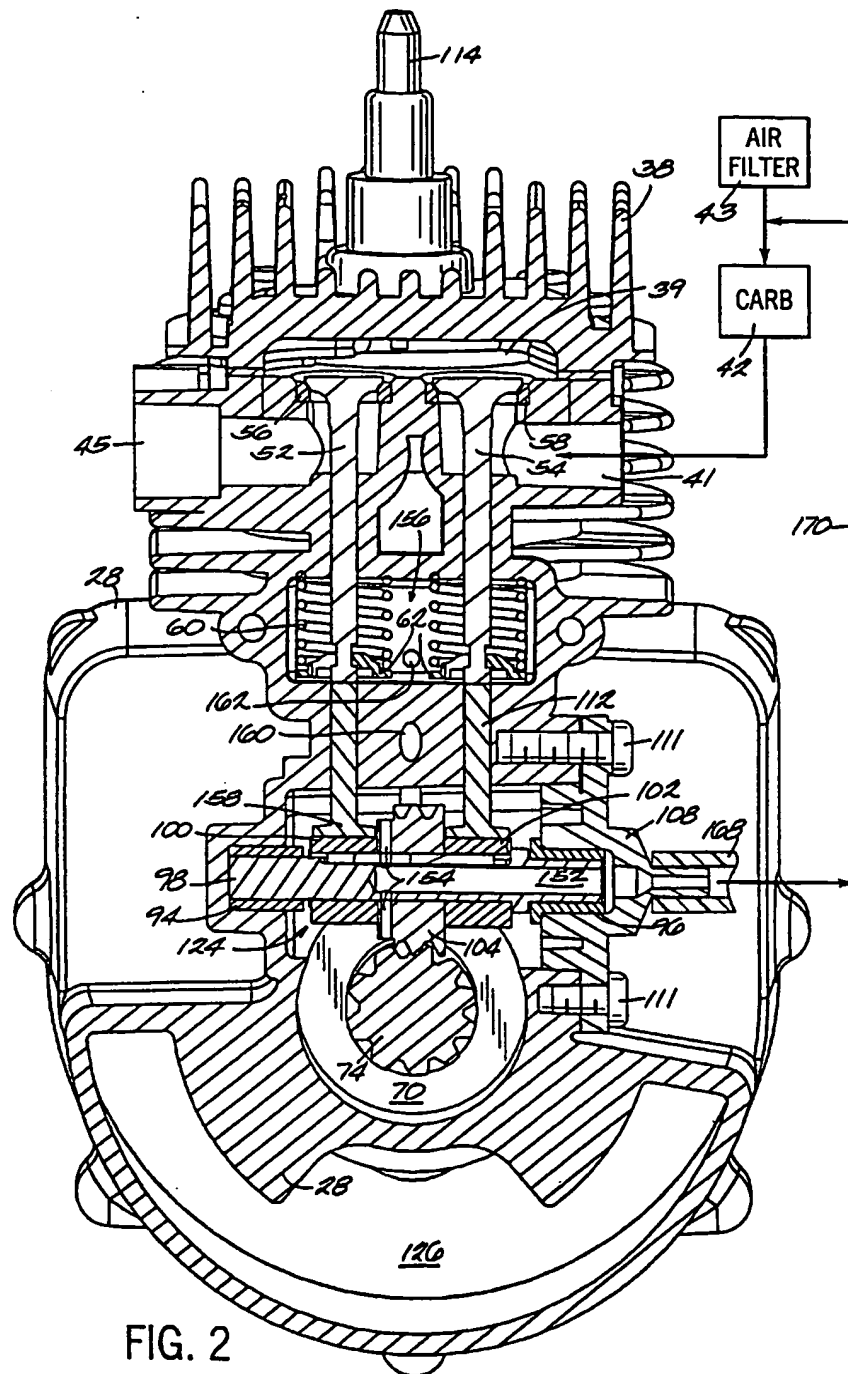


FIG. 2







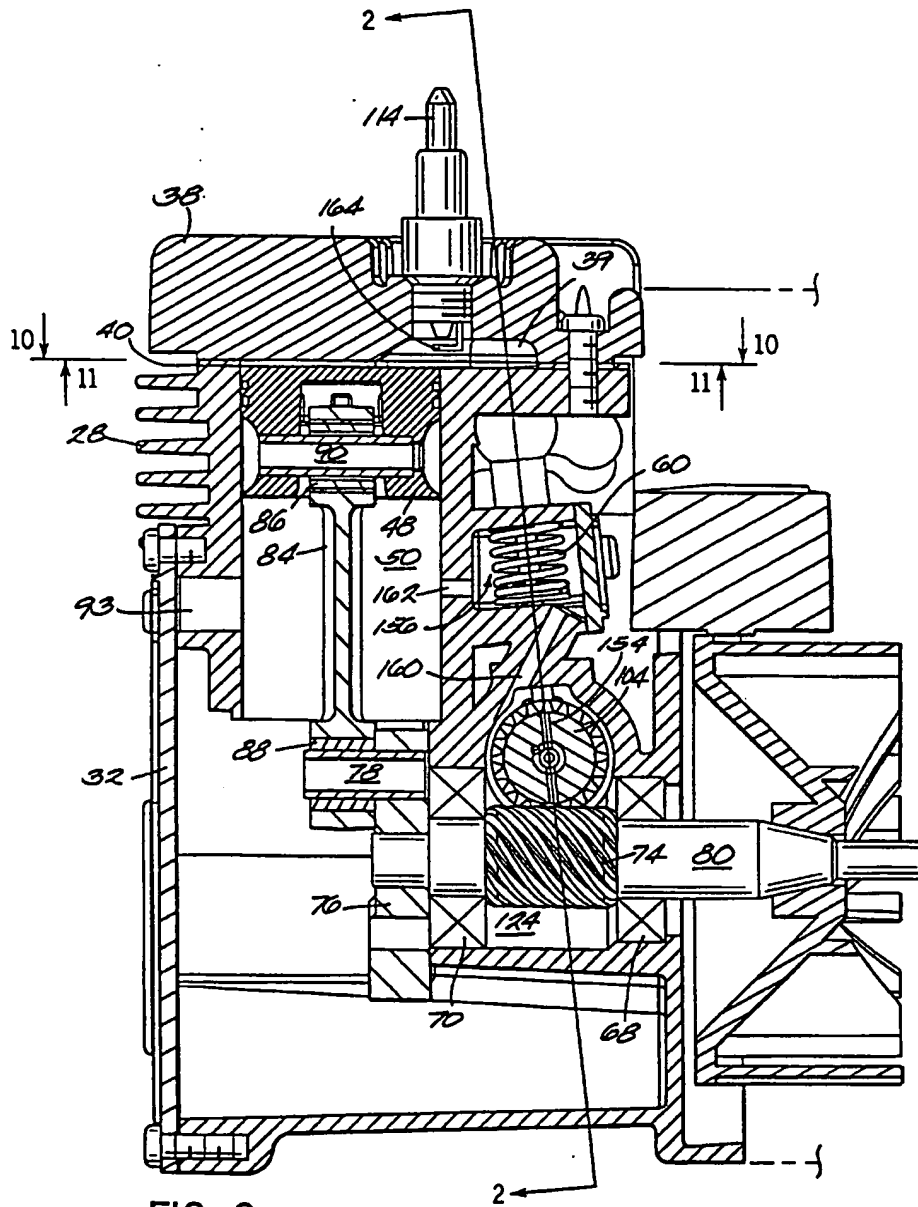


FIG. 3


5/26

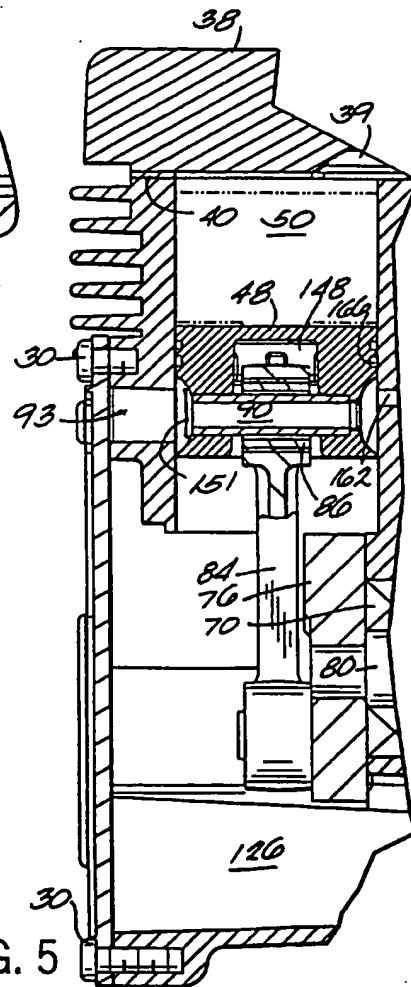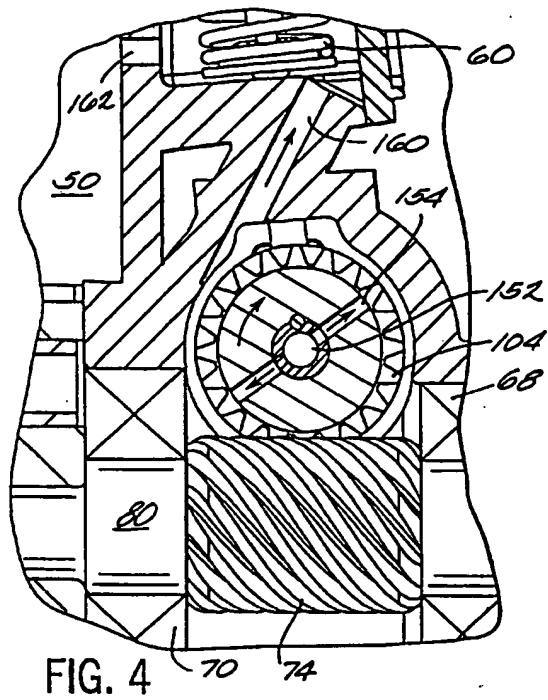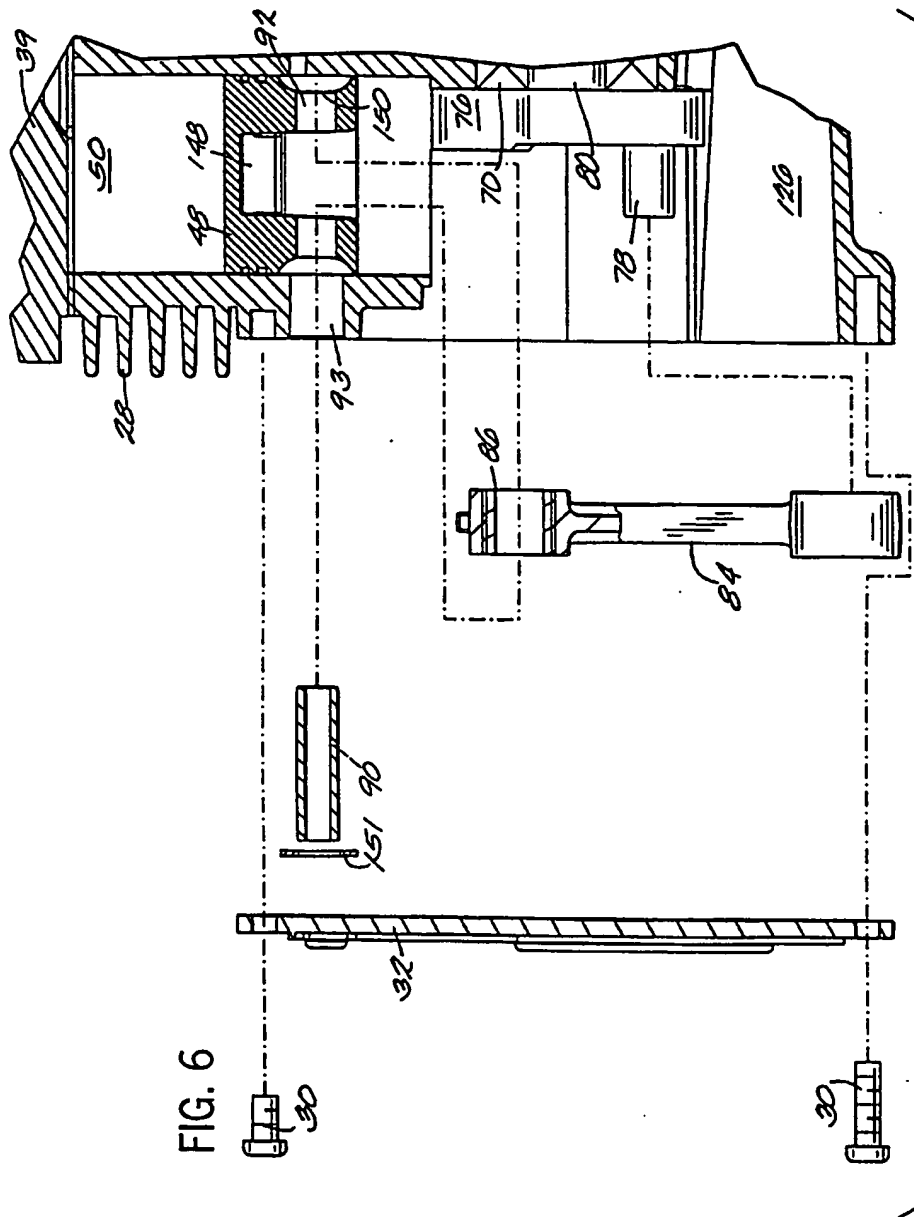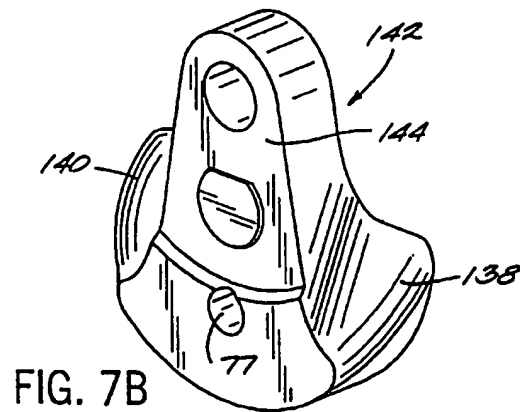

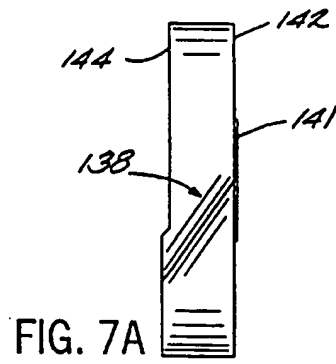

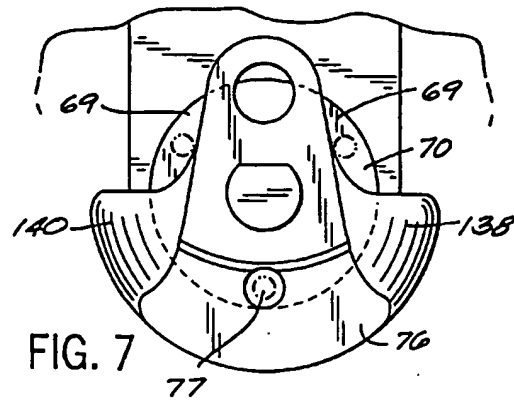



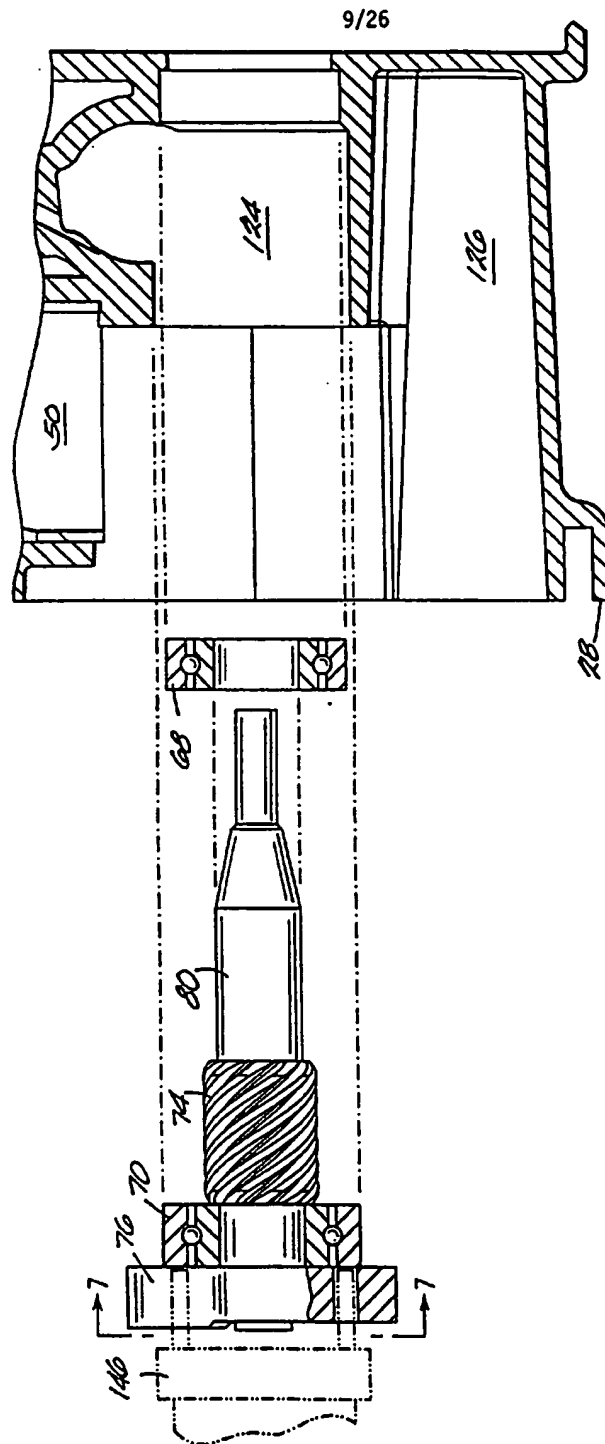

SUBSTITUTE SHEET (RULE 26)

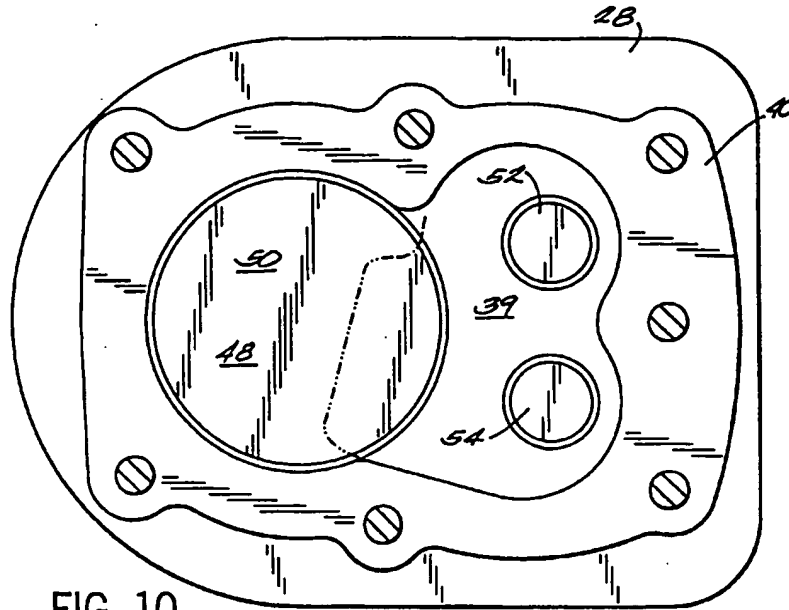


FIG. 10


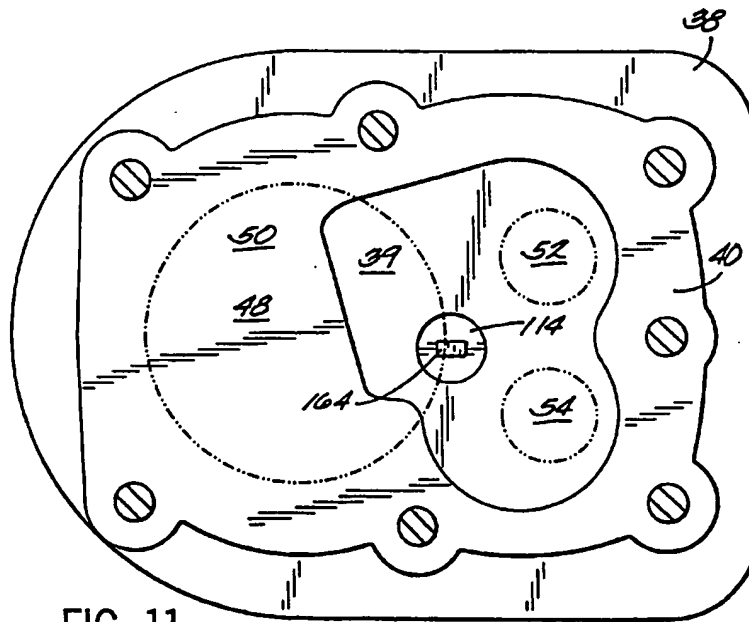


FIG. 11



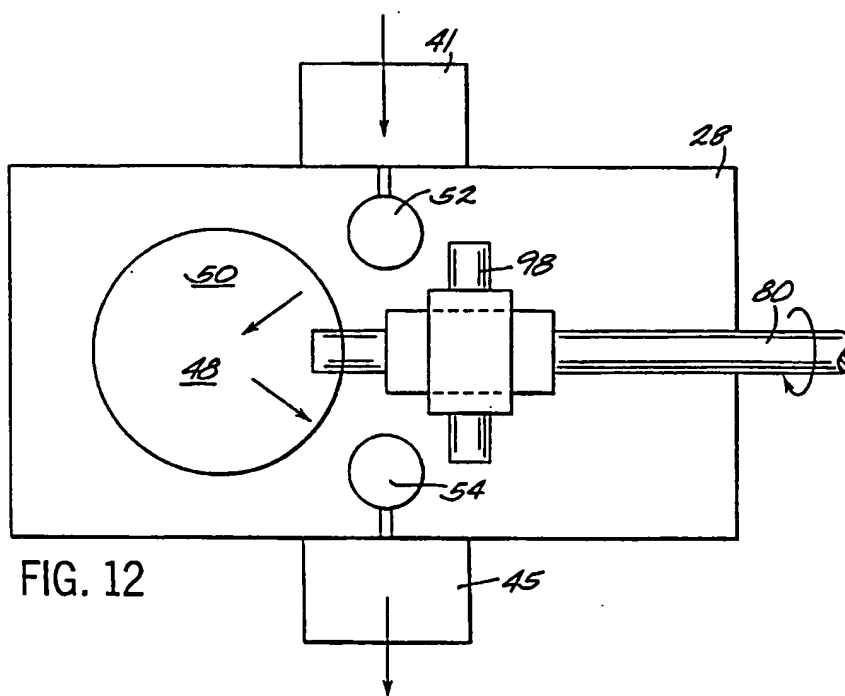

12/26

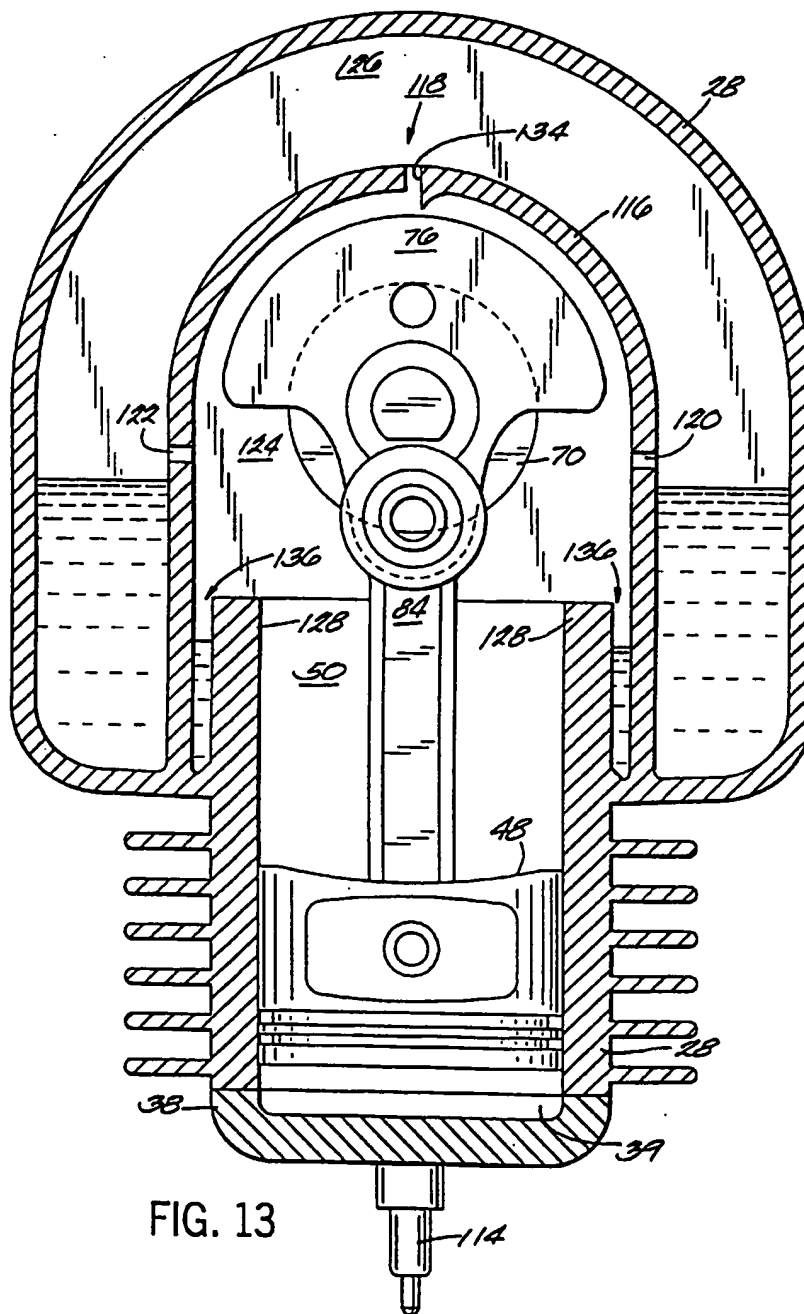


FIG. 13

SUBSTITUTE SHEET (RULE 26)

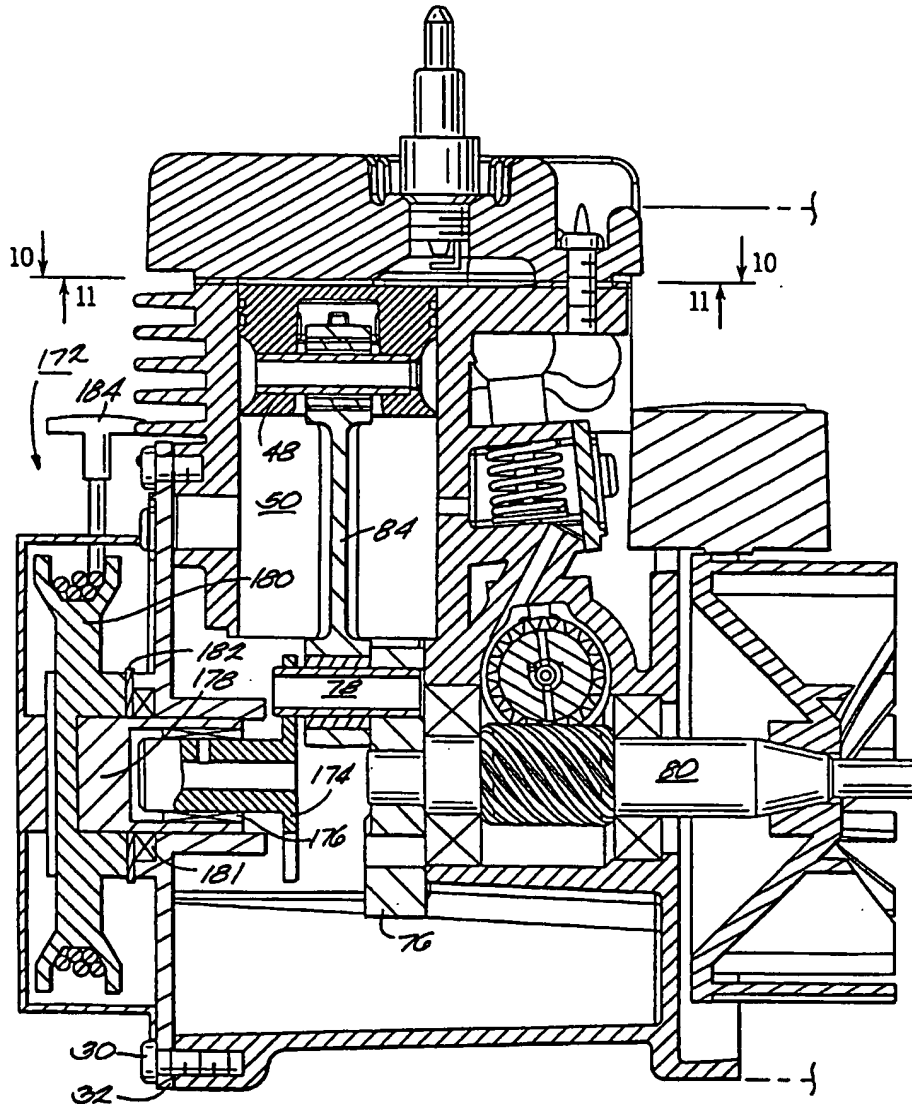


FIG. 14

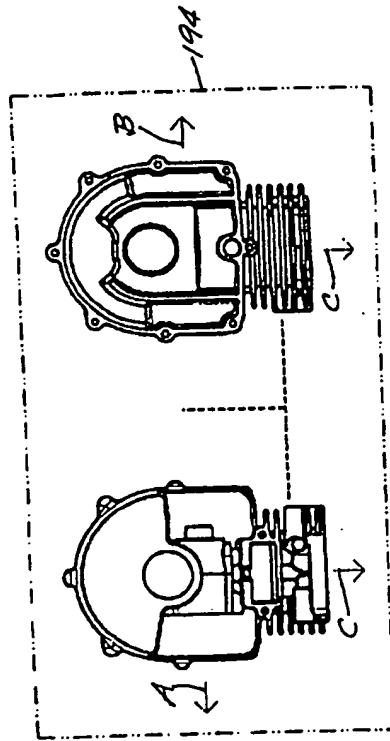


FIG. 15

FIG. 16





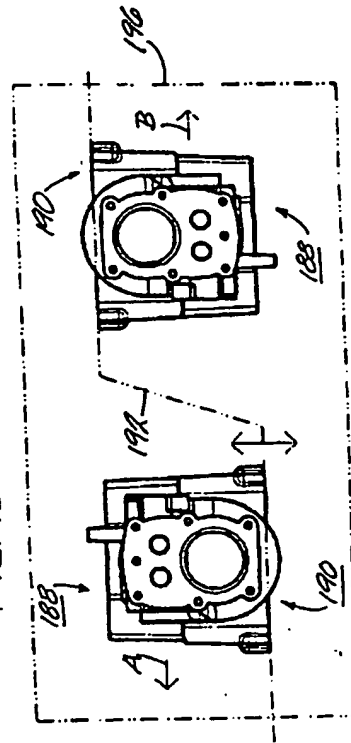


FIG. 17

FIG. 18

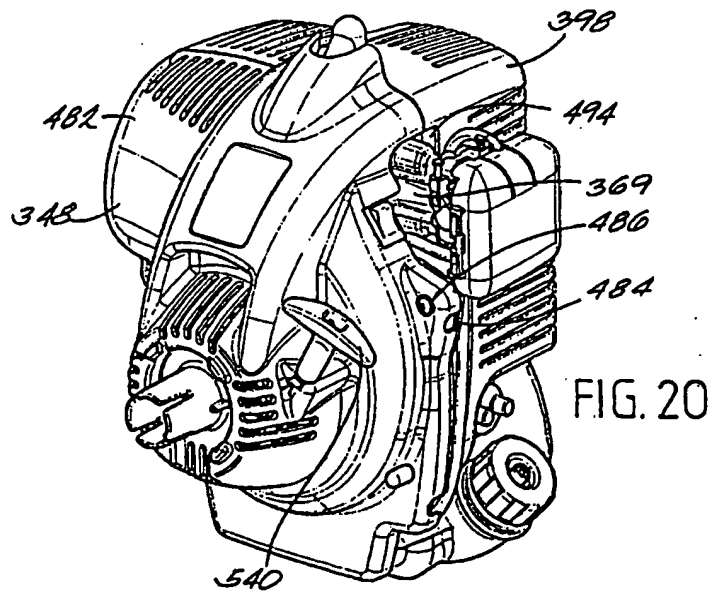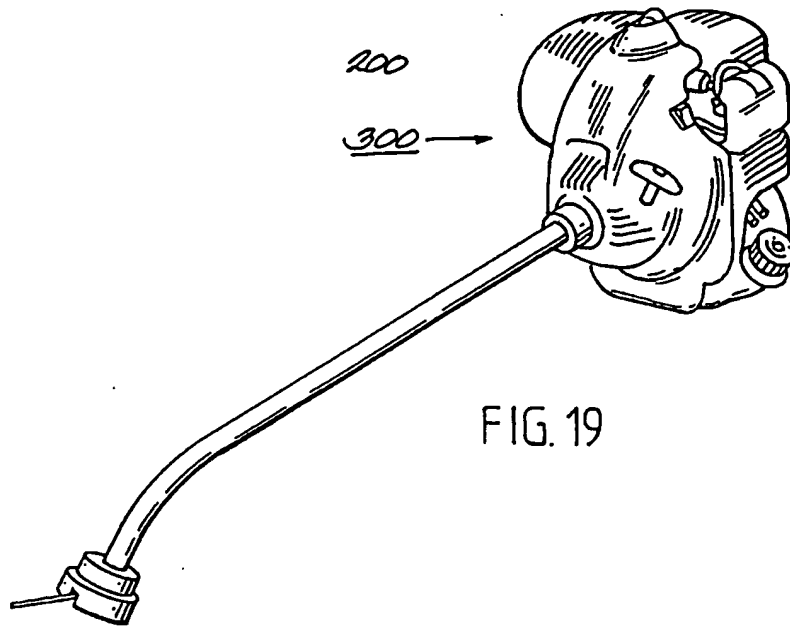

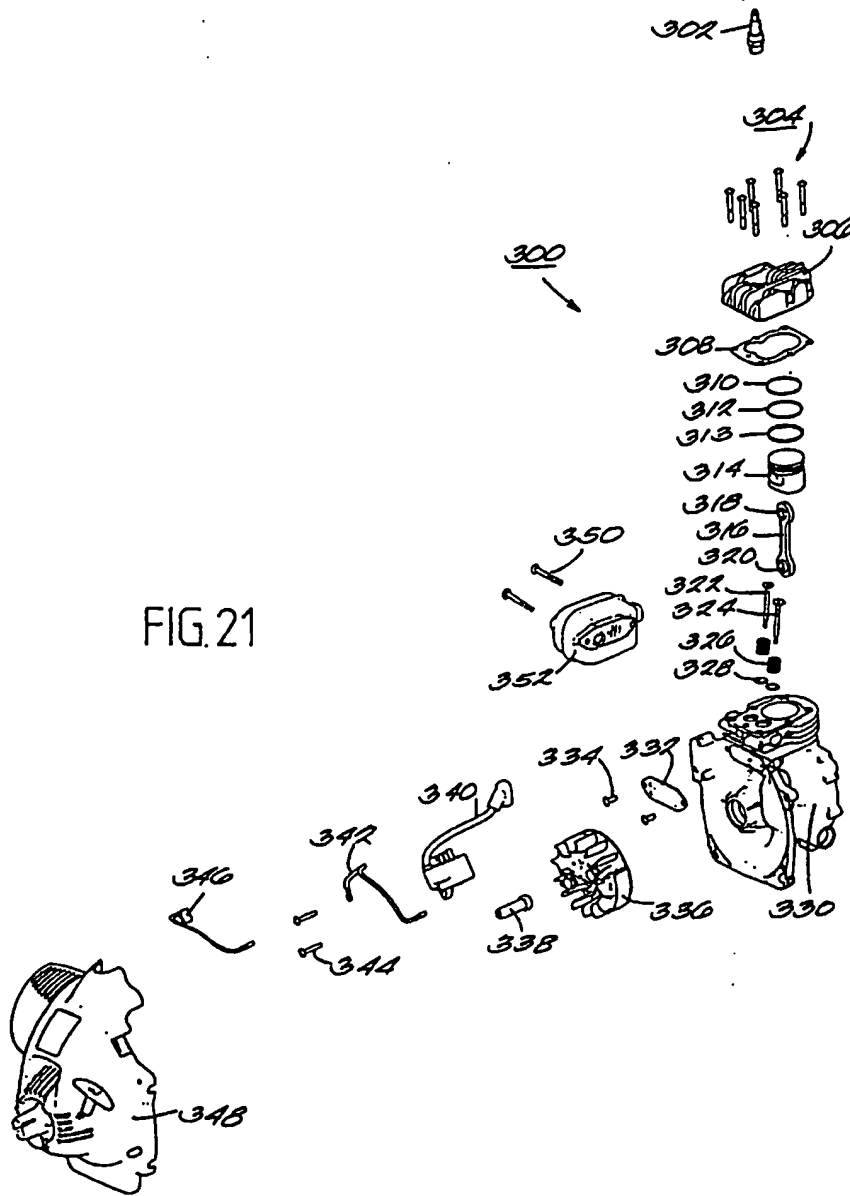

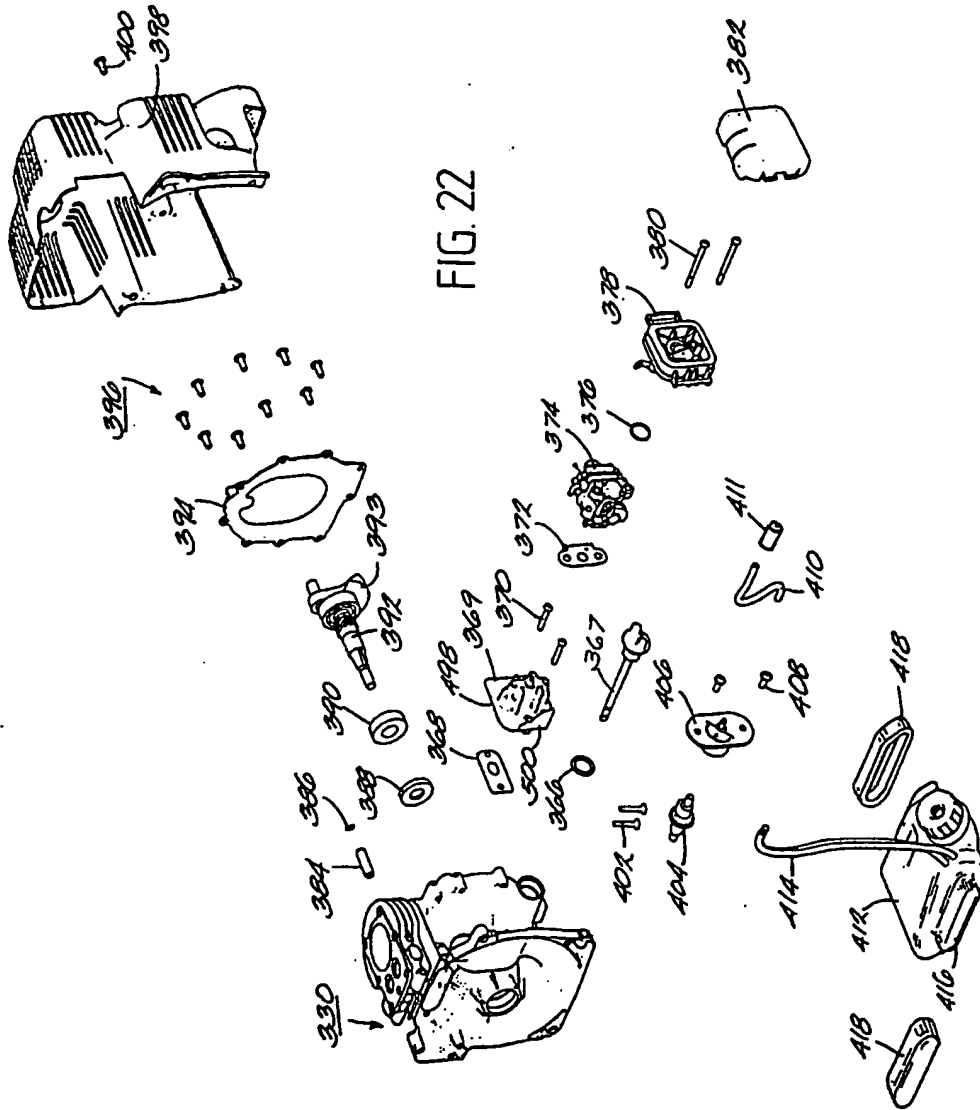

**SUBSTITUTE SHEET (RULE 26)**

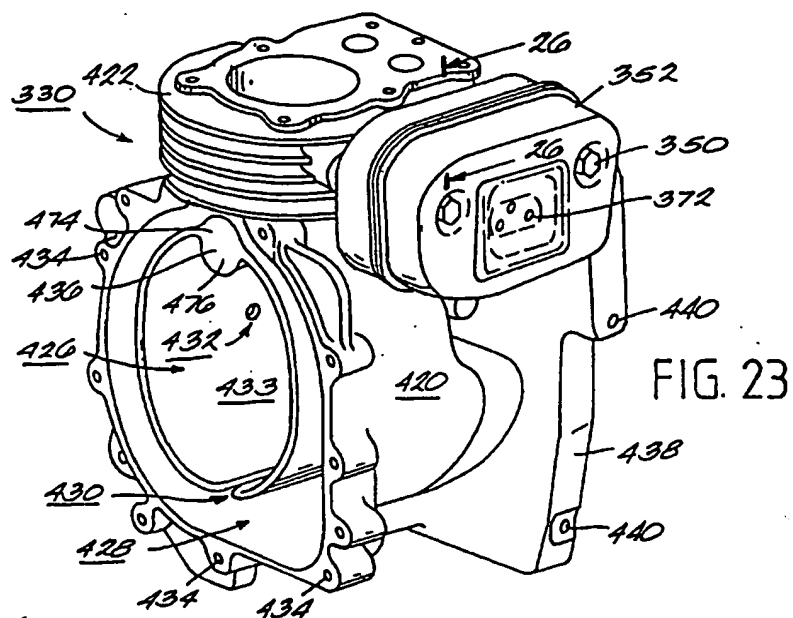


FIG. 23

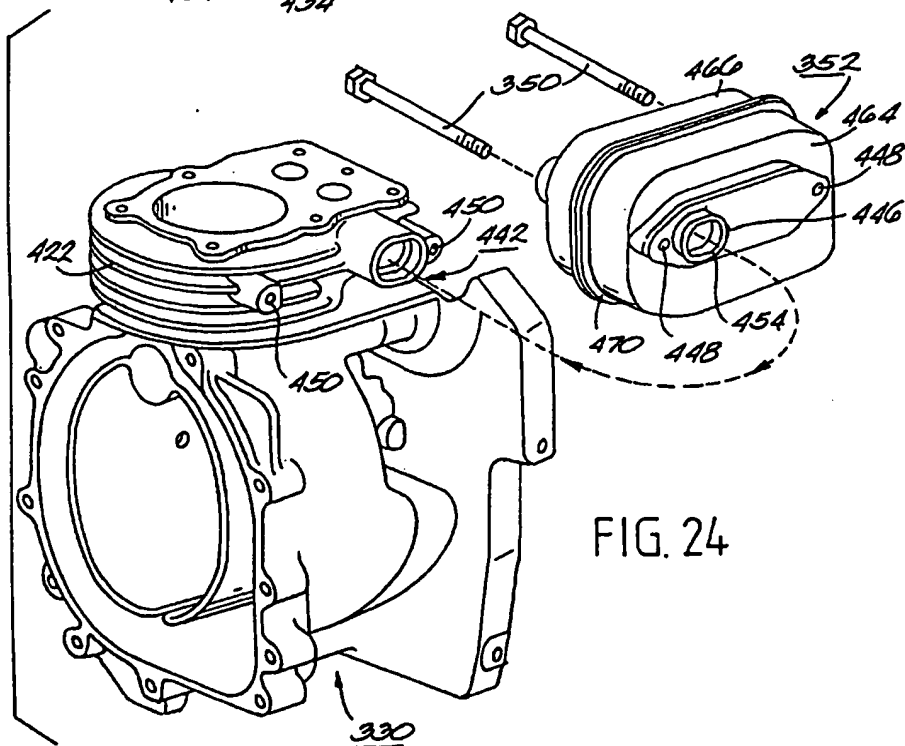
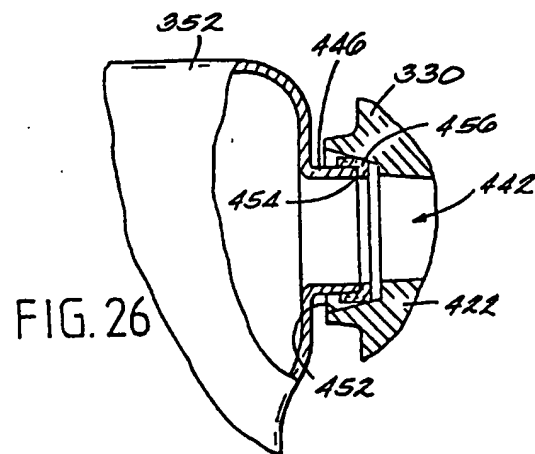


FIG. 24





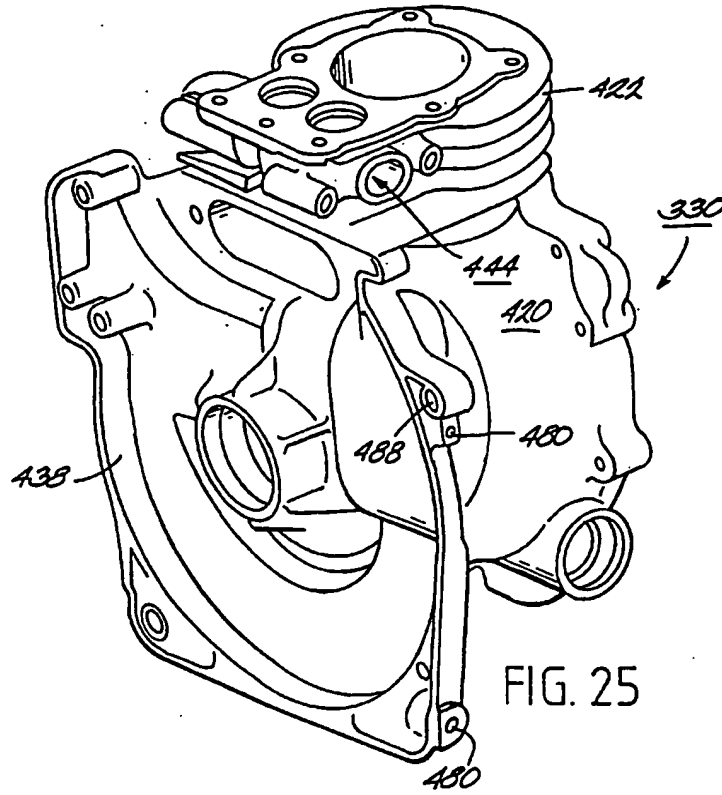


FIG. 25

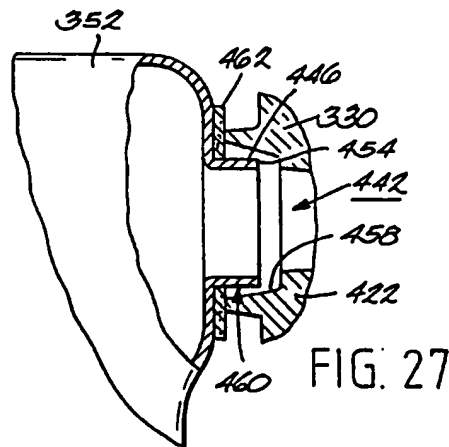
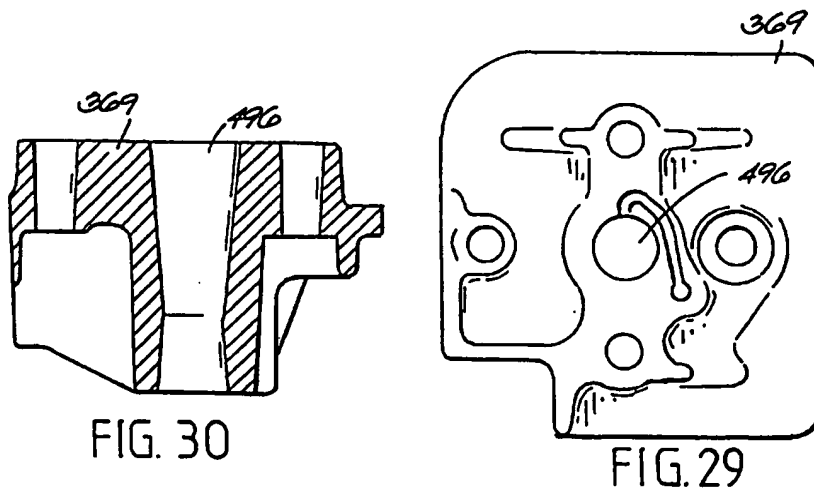
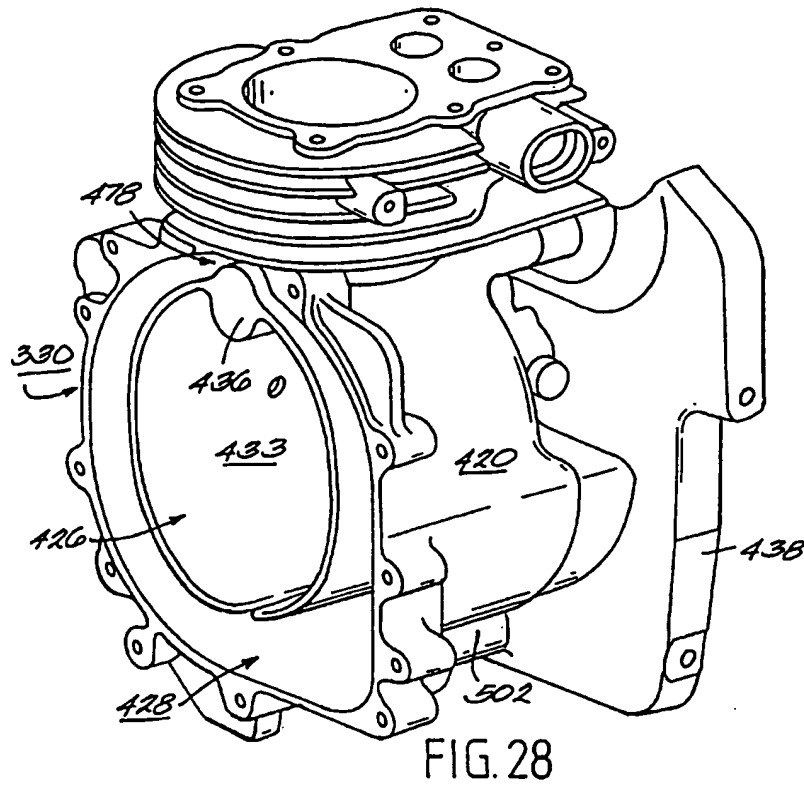
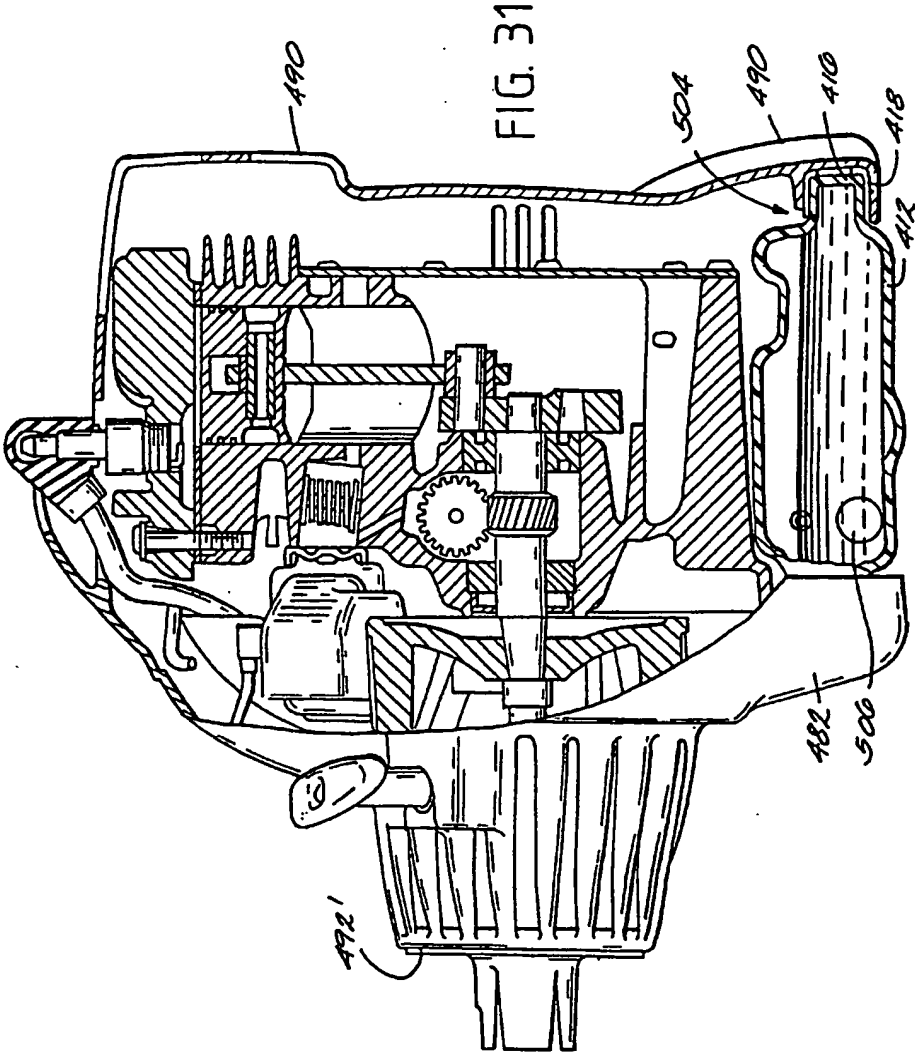


FIG. 27





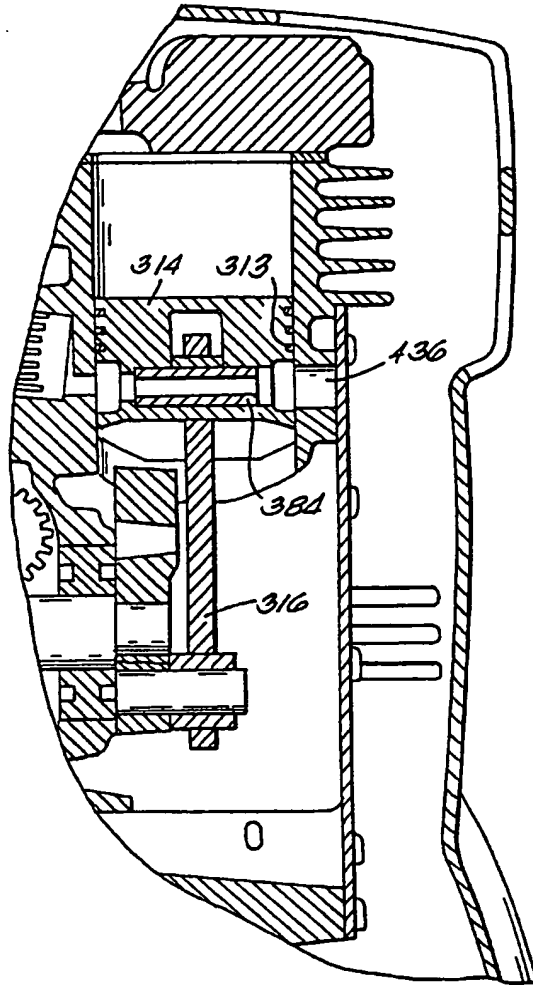


FIG. 32

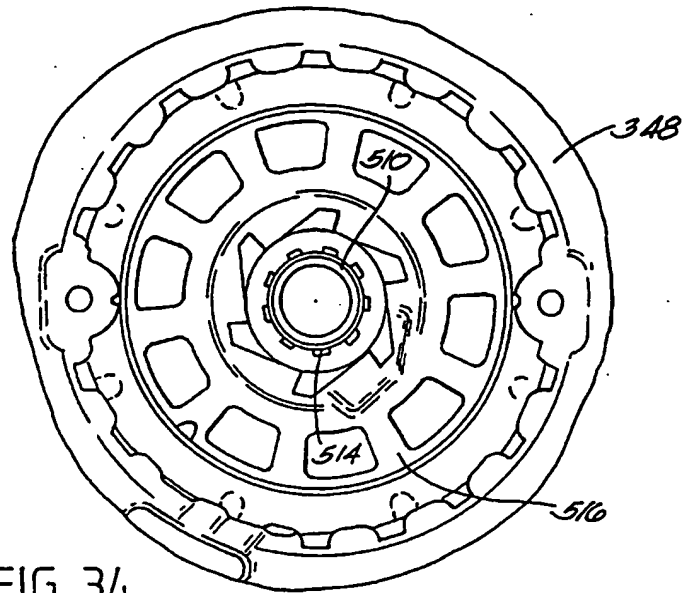


FIG. 34

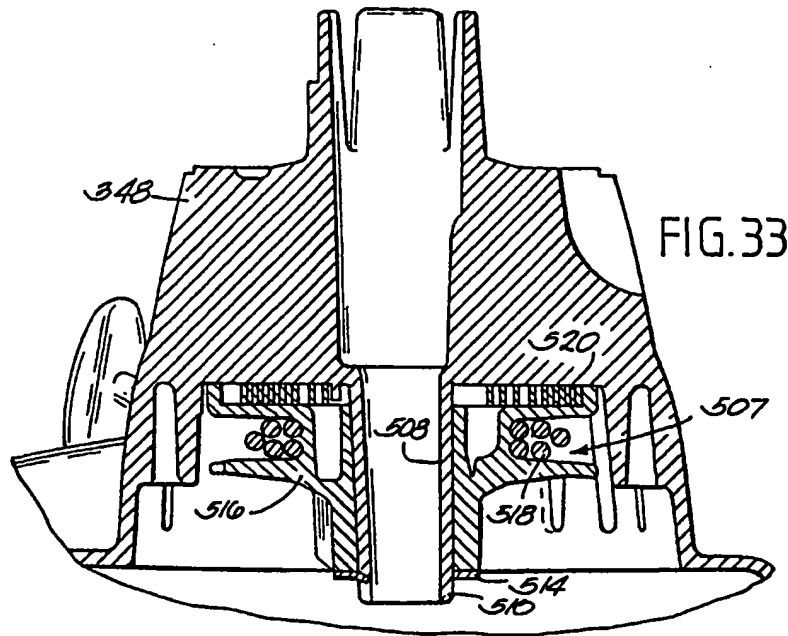
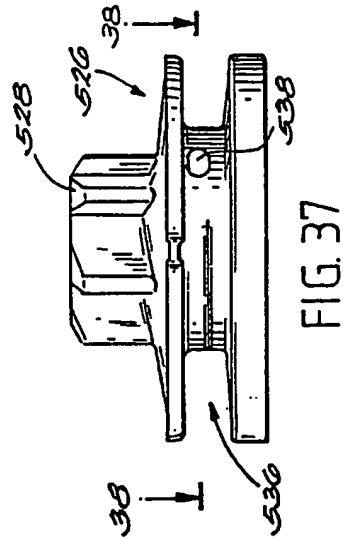
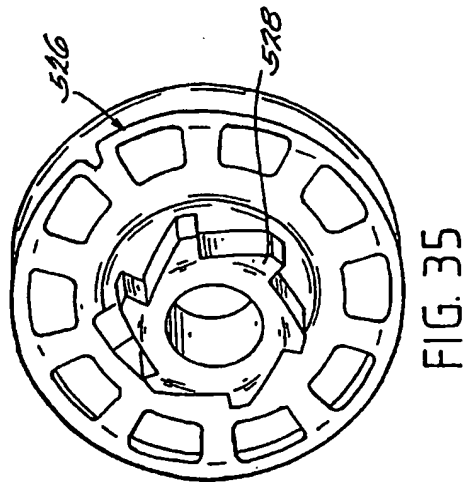
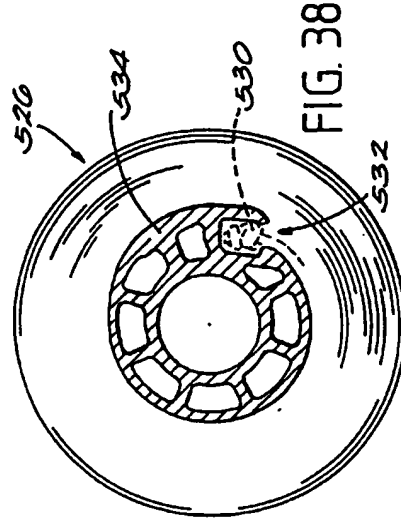
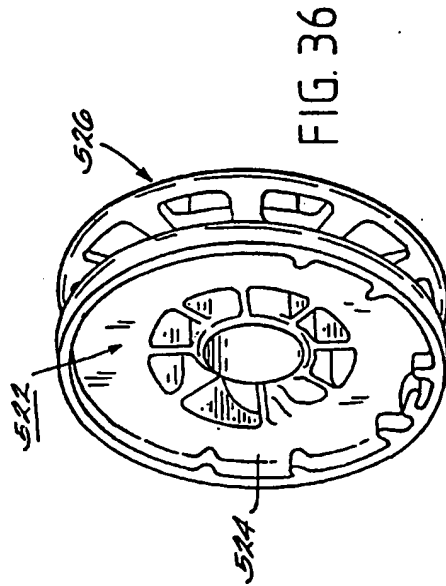


FIG. 33



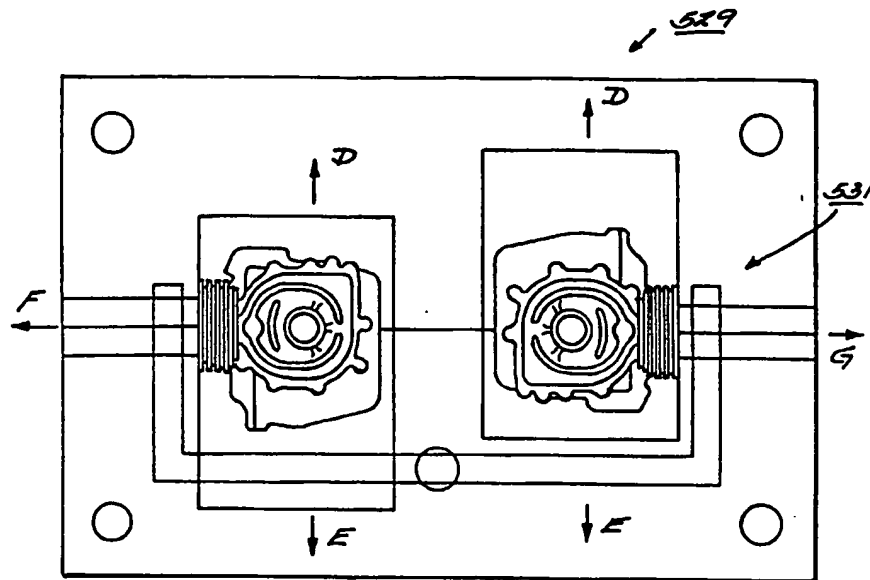


FIG. 39

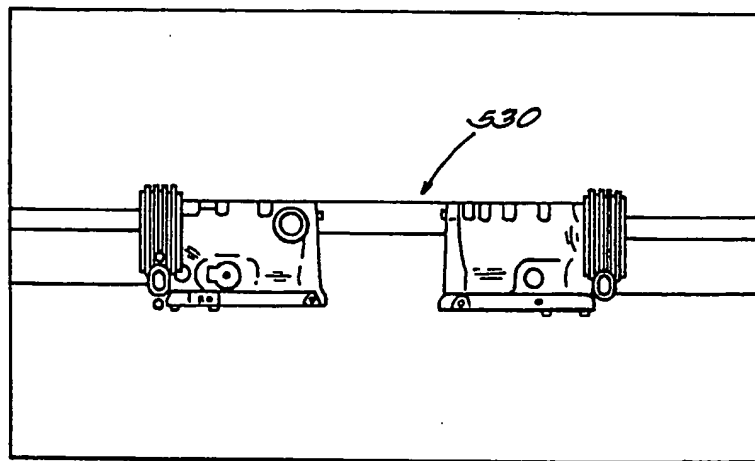


FIG. 40



# INTERNATIONAL SEARCH REPORT

Inter. Appl. No.  
PCT/US 00/00841

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 F02B63/02 F01M11/06

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 F02B F01M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 779 412 A (HONDA MOTOR CO LTD) 18 June 1997 (1997-06-18) figure 1 abstract figures 18,19 page 8, line 4 - line 37	1-40
A	WO 99 02824 A (RYOBI NORTH AMERICA INC) 21 January 1999 (1999-01-21) figure 1 abstract claims 1-19	1,39,40
A	US 1 878 224 A (PACKARD) 20 September 1932 (1932-09-20) figures 1-3 page 1, line 61 - line 104	1
	-/-	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (see specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"Z" document member of the same patent family

Date of the actual completion of the international search

13 April 2000

Date of mailing of the international search report

20/04/2000

Name and mailing address of the ISA  
European Patent Office, P.O. 5818 Petersilien 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3018

Authorized officer

Wassenaar, G

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/US 00/00841

## C. (Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE 41 42 875 A (RYOBI LTD) 2 July 1992 (1992-07-02) figures 2,3 abstract column 8, line 9 - line 32	1-5, 39, 40

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 00/00841

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0779412 A	18-06-1997	JP 9170417 A	30-06-1997
		JP 9170418 A	30-06-1997
		JP 9170420 A	30-06-1997
		JP 9177528 A	08-07-1997
		CN 1157877 A	27-08-1997
		US 5947075 A	07-09-1999
WO 9902824 A	21-01-1999	AU 3721197 A	08-02-1999
US 1878224 A	20-09-1932	NONE	
DE 4142875 A	02-07-1992	US 5243937 A	14-09-1993